


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 05/05/18'		

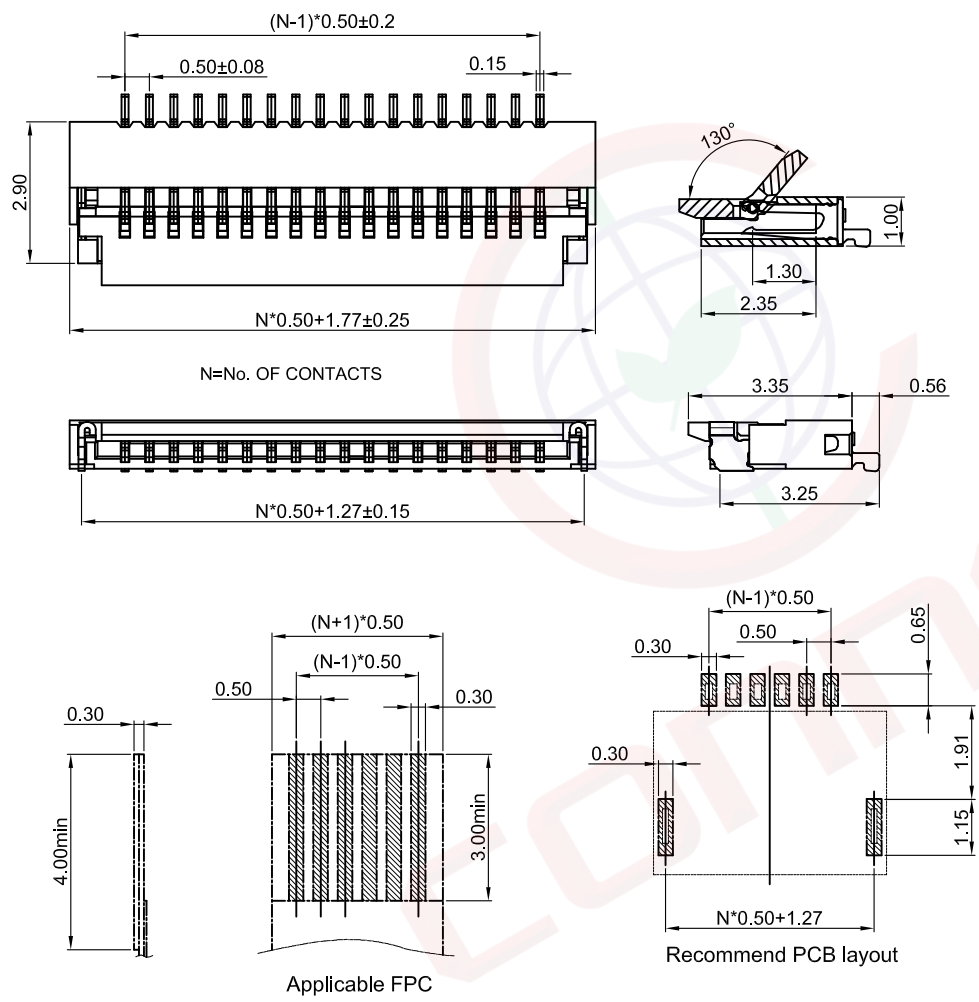

- NOTES:**
- Material
 - 1.1 Insulator: Thermoplastic(UL 94V-0).
 - 1.2 Contact: Copper alloy.
 - Specification
 - 2.1 Temperature: -25°C ~ +85°C.
 - 2.2 Contact resistance: 30mΩ max.
 - 2.3 Insulation resistance: 100MΩ min.
 - 2.4 Dielectric withstanding voltage: AC 100V per minute.
 - Product number code:

DS1020-20- X X X X X

 - Packing type: B: Tube, R: Tape on reel
 - Contact plating: 8: Gold flash
 - Cover color: B: Black
 - Housing color: V: Ivory
 - No. of contacts: 04~40

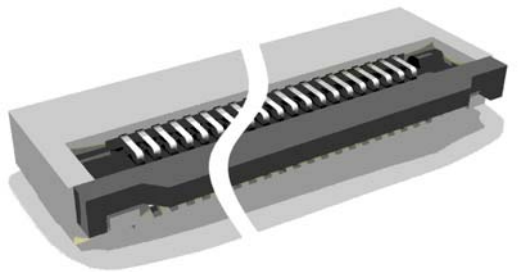

(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	0.50mm FPC ZIF R/A Connector
X.	±0.60	X.	±5°	UNITS	mm		H=1.0mm
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1020-20 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNELY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1020-20-XXXXX-A					

1 2 3 4 5 6 7 8