


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

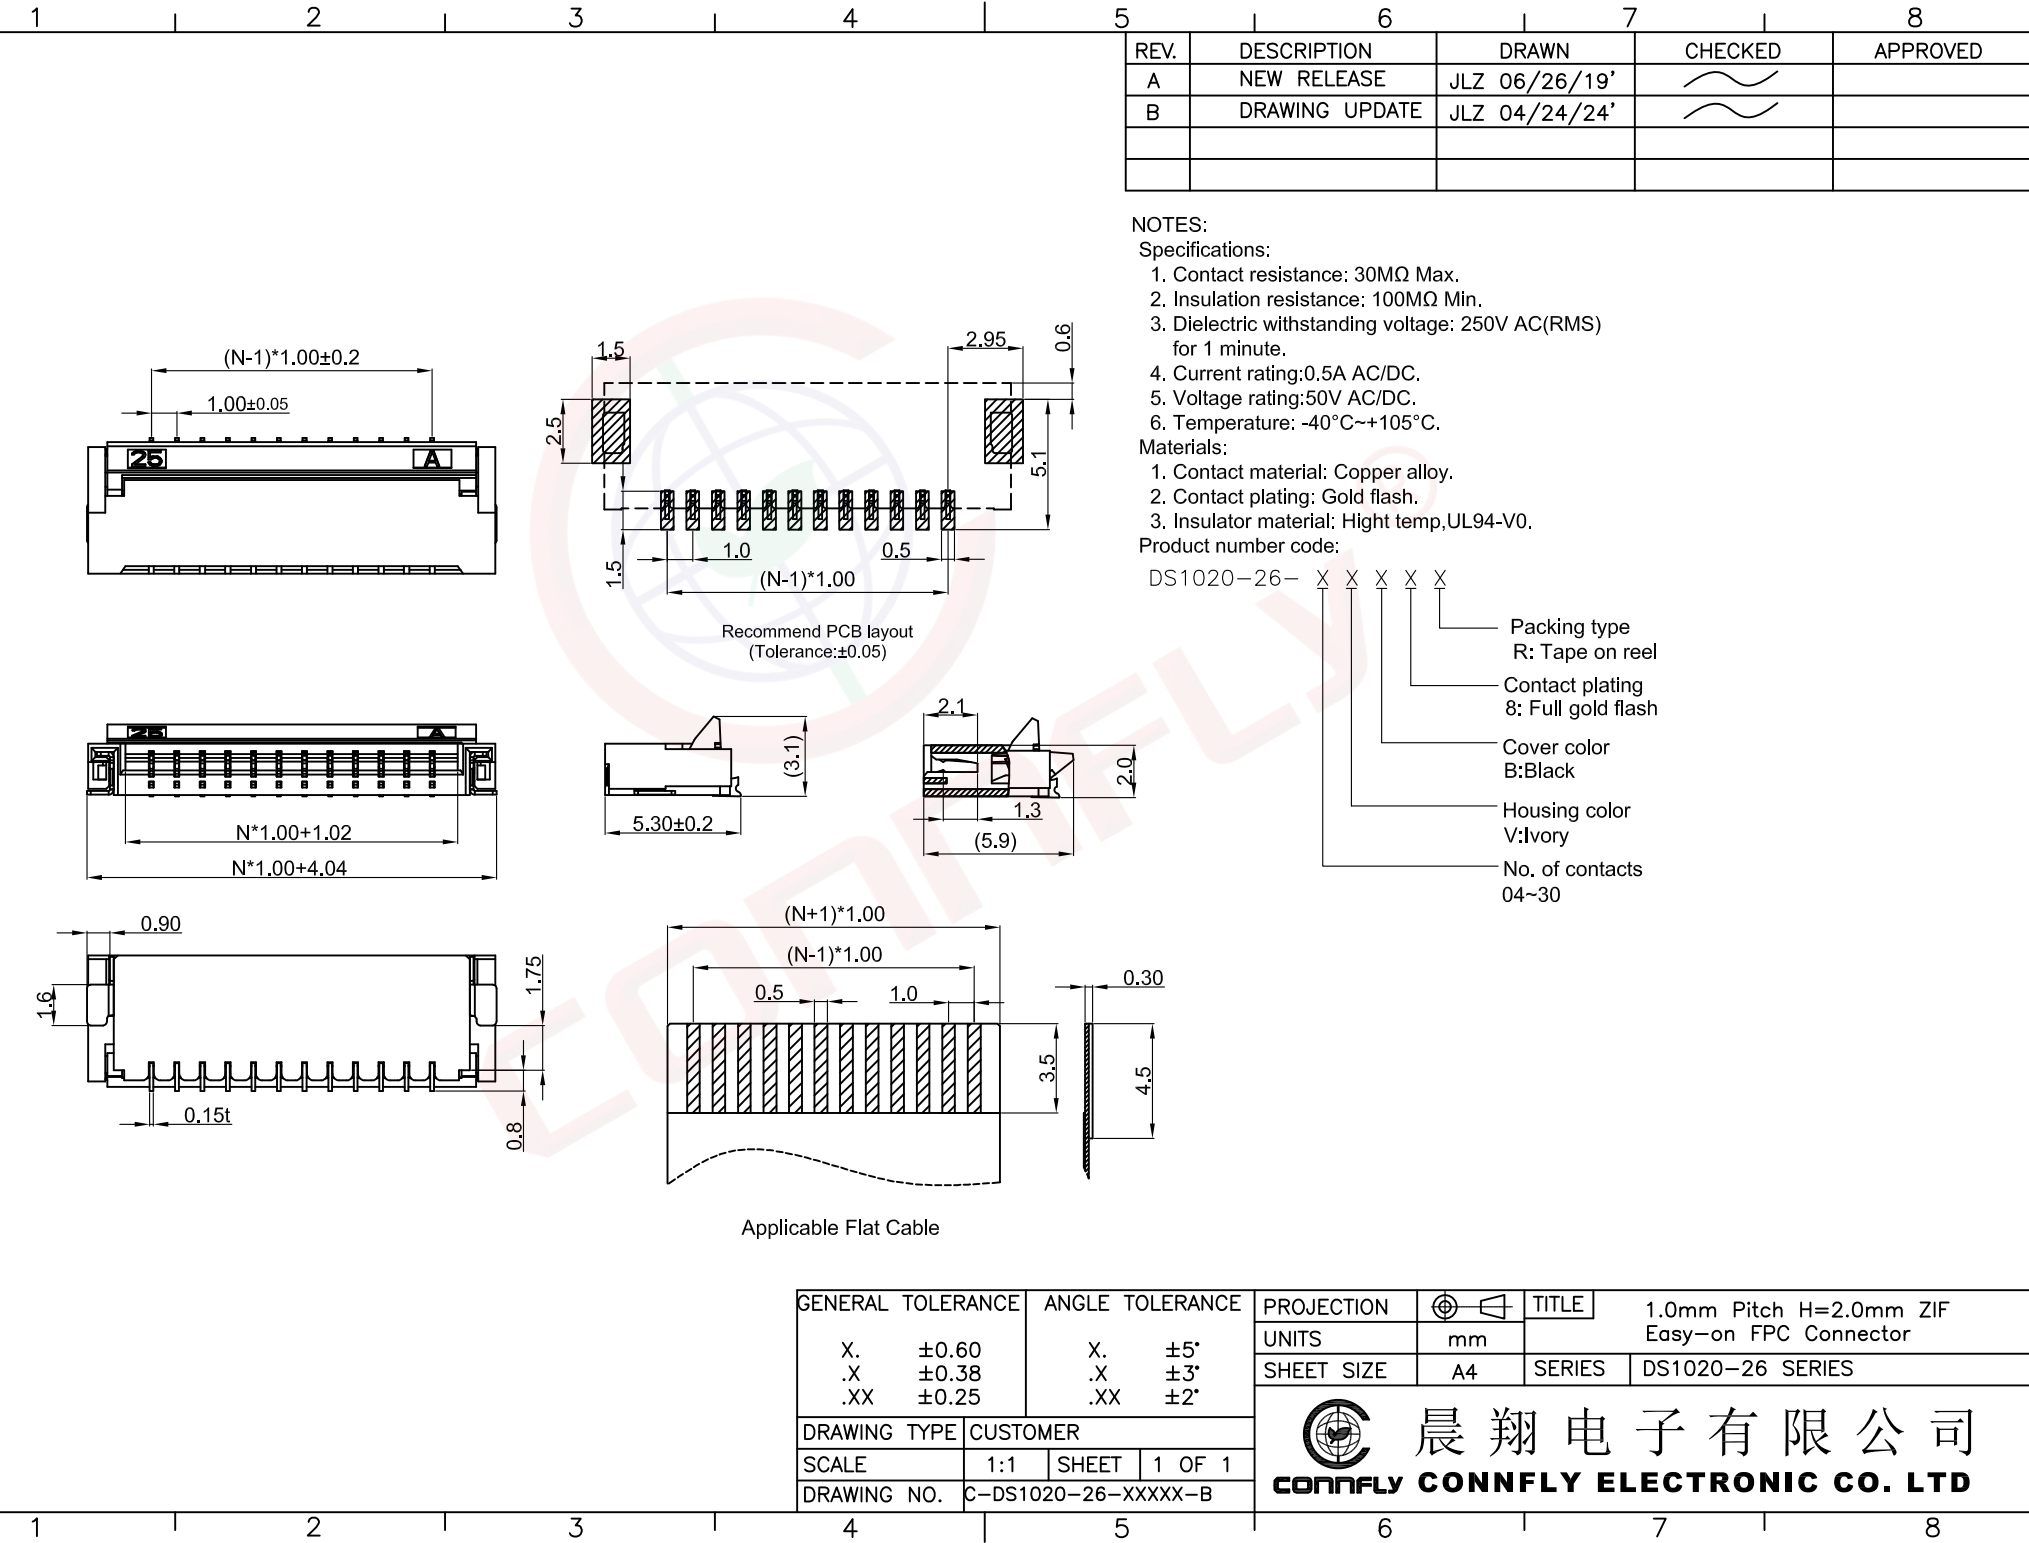

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/26/19'		
B	DRAWING UPDATE	JLZ 04/24/24'		

- NOTES:
- Specifications:
- Contact resistance: 30MΩ Max.
  - Insulation resistance: 100MΩ Min.
  - Dielectric withstanding voltage: 250V AC(RMS) for 1 minute.
  - Current rating:0.5A AC/DC.
  - Voltage rating:50V AC/DC.
  - Temperature: -40°C~+105°C.

- Materials:
- Contact material: Copper alloy.
  - Contact plating: Gold flash.
  - Insulator material: Hight temp,UL94-V0.

Product number code:

DS1020-26- X X X X

- Packing type  
R: Tape on reel
- Contact plating  
8: Full gold flash
- Cover color  
B:Black
- Housing color  
V:Ivory
- No. of contacts  
04~30

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	1.0mm Pitch H=2.0mm ZIF Easy-on FPC Connector
X.	±0.60	X.	±5°	UNITS	mm	SHEET SIZE	A4
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1020-26 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 <b>CONNELY CONNELY ELECTRONIC CO. LTD</b>			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1020-26-XXXXX-B					