

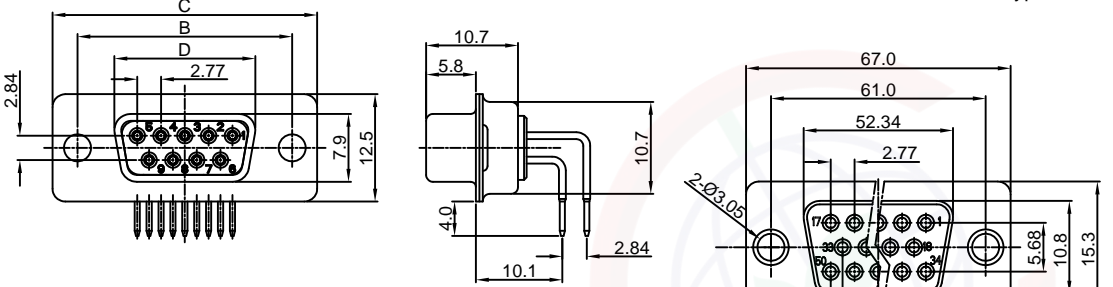


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document, in any form or by any means, without the prior written permission of CONNELY, is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

[Female]

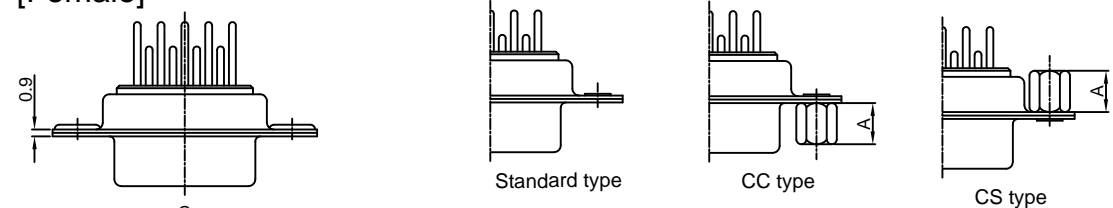

[Male]

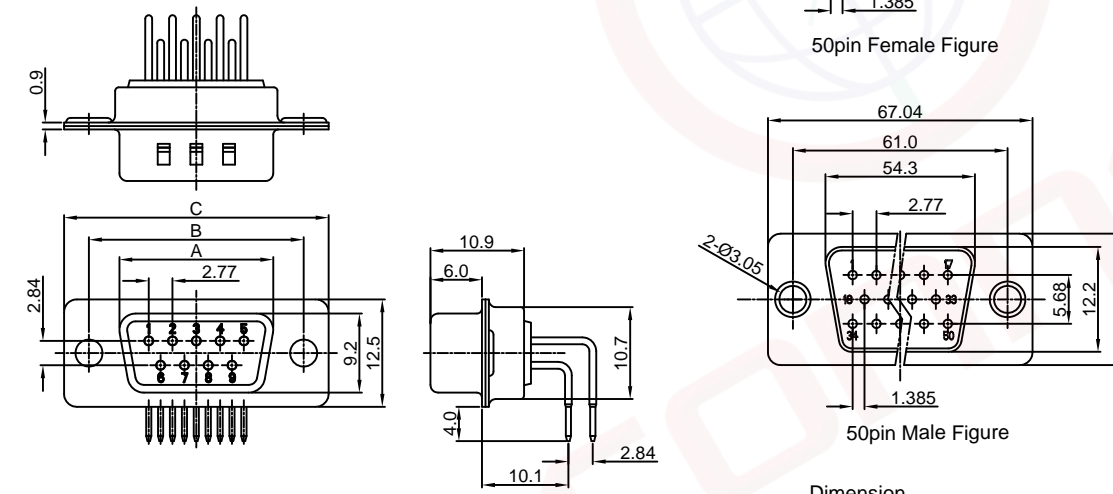

Dimension

Position	A±0.2	B±0.2	C±0.3	D
9	17.90	24.99	30.80	16.33
15	26.50	33.32	39.14	24.66
25	40.00	47.04	53.04	38.38
37	56.50	63.50	69.32	54.84

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 01/10/08'		LJC 01/10/08'
B	DRAWING UPDATE	JLZ 11/06/18'		

NOTES:

- Electrical characteristics:
 - Contact resistance: 20mΩ Max. Initial.
 - Dielectric withstanding voltage: 500V AC(rms) for 1 minute.
 - Insulation resistance: 1000MΩ Min.
- Environment characteristics:
 - Temperature range: -40°C~+105°C.
- Materials:
 - Insulator:PBT+Glass fiber
 - Shell:Steel
 - Contact:Copper alloy
- Product number code:

DS1034-03- X X X X X X X

- Screw DIM. A
- S: Standard(W/O nut)
- 1: 5.00 2: 3.00
- 3: 5.20 4: 4.80
- 5: 5.80 6: 3.80
- Screw type
- S: Standard(W/O nut)
- 1: CC Type
- 2: CS Type
- Contact plating
- 8: Full gold flash
- C: Full 3u" gold
- Shell plating
- N: Fornt shell nickel,back shell tin
- Housing color
- B: Black
- W: White
- U: Blue
- Connector type
- M: Male
- F: Female
- No.of contacts
- 09 15 25 37 50



(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1034-03-XXXXXXX-B		

PROJECTION	TITLE	MACHINE PIN D-SUB	
		R/A(9.4mm) TYPE	
UNITS	mm	SHEET	DS1034-03 SERIES

晨翔电子有限公司
CONNFLY ELECTRONIC CO. LTD