
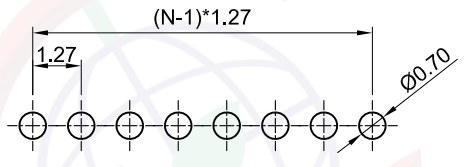

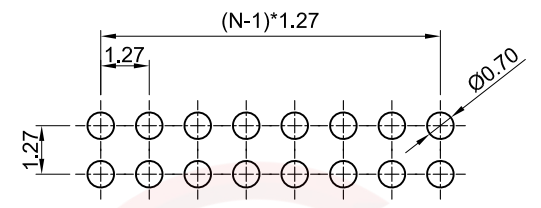




The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 09/02/17'	HZW 09/02/17'	LJC 09/02/17'
B	DRAWING UPDATE	JLZ 07/09/19'		

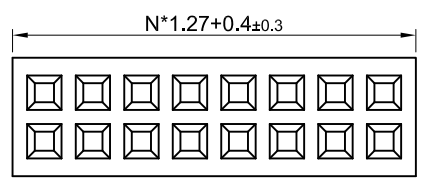

Recommend PCB layout
(Tolerance:±0.05)

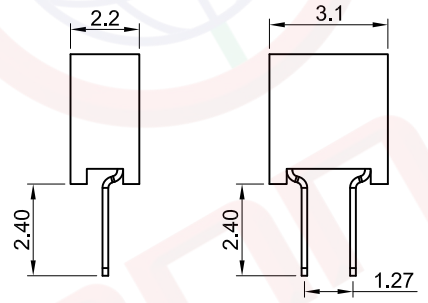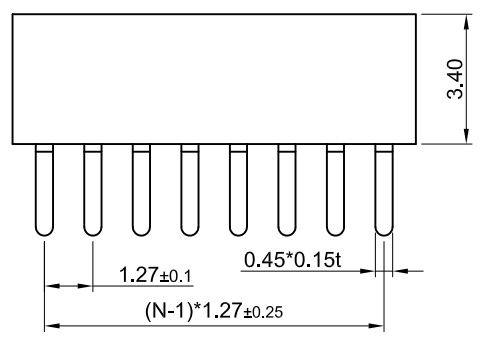


Single Row Double Row
N=No.Of Contacts N=No.Of Contacts/2

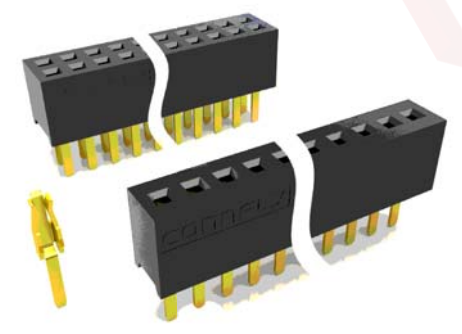

(Series Image-Reference Only)

- Notes:
- Specifications:
- Contact Resistance: 30mΩ Max.
 - Insulation Resistance: 500MΩ Min.
 - Dielectric Withstanding Voltage: 300V AC(rms) For 1 Minute.
 - Current Rating:1A.
 - Voltage Rating:125V.
 - Temperature: -40°C~+105°C.
- Materials:
- Contact Material: Copper Alloy.
 - Contact Plating: Gold Plating Over Nickel.
 - Insulator Material: High Temp,Black,UL94-V0.
- Product Number Code:

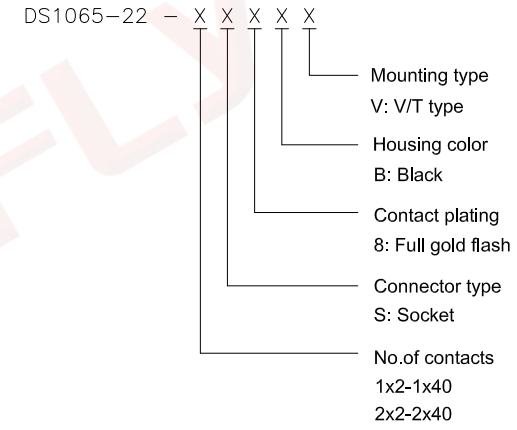

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	1.27mm Female Header
X.	±0.60	X.	±5°	UNITS	mm		V/T Type H=3.4mm
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1065-22 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1065-22-XXXXX-B					

1 2 3 4 5 6 7 8