

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 09/09/14'		

NOTES:

1.SPECIFICATIONS

- .CURRENT RATING: 0.5A/pin Max.
- .VOLTAGE RATING: 30V(DC)
- .DIELECTRIC WITHSTANDING VOLTAGE: 100VAC 1 minute.
- .CONTACT RESISTANCE: 50mΩ Max.
- .INSULATION RESISTANCE: 100MΩ Min
- .TEMPERATURE RANGE: -40°C--+105°C

2.MATERIALS

- .HOUSING: PLASTIC
- .SHELL: STEEL
- .CONTACT: COPPER ALLOY

3.PRODUCT NUMBER CODE:


DS1105-03 - X X X X

Packing Type
R: Tape On Reel
T: Tray

Contact plating
0: Selective gold flash
C: Selective 3u" gold

Shell Plating
N: Nickel
8: Full Gold

Color of housing
B: Black

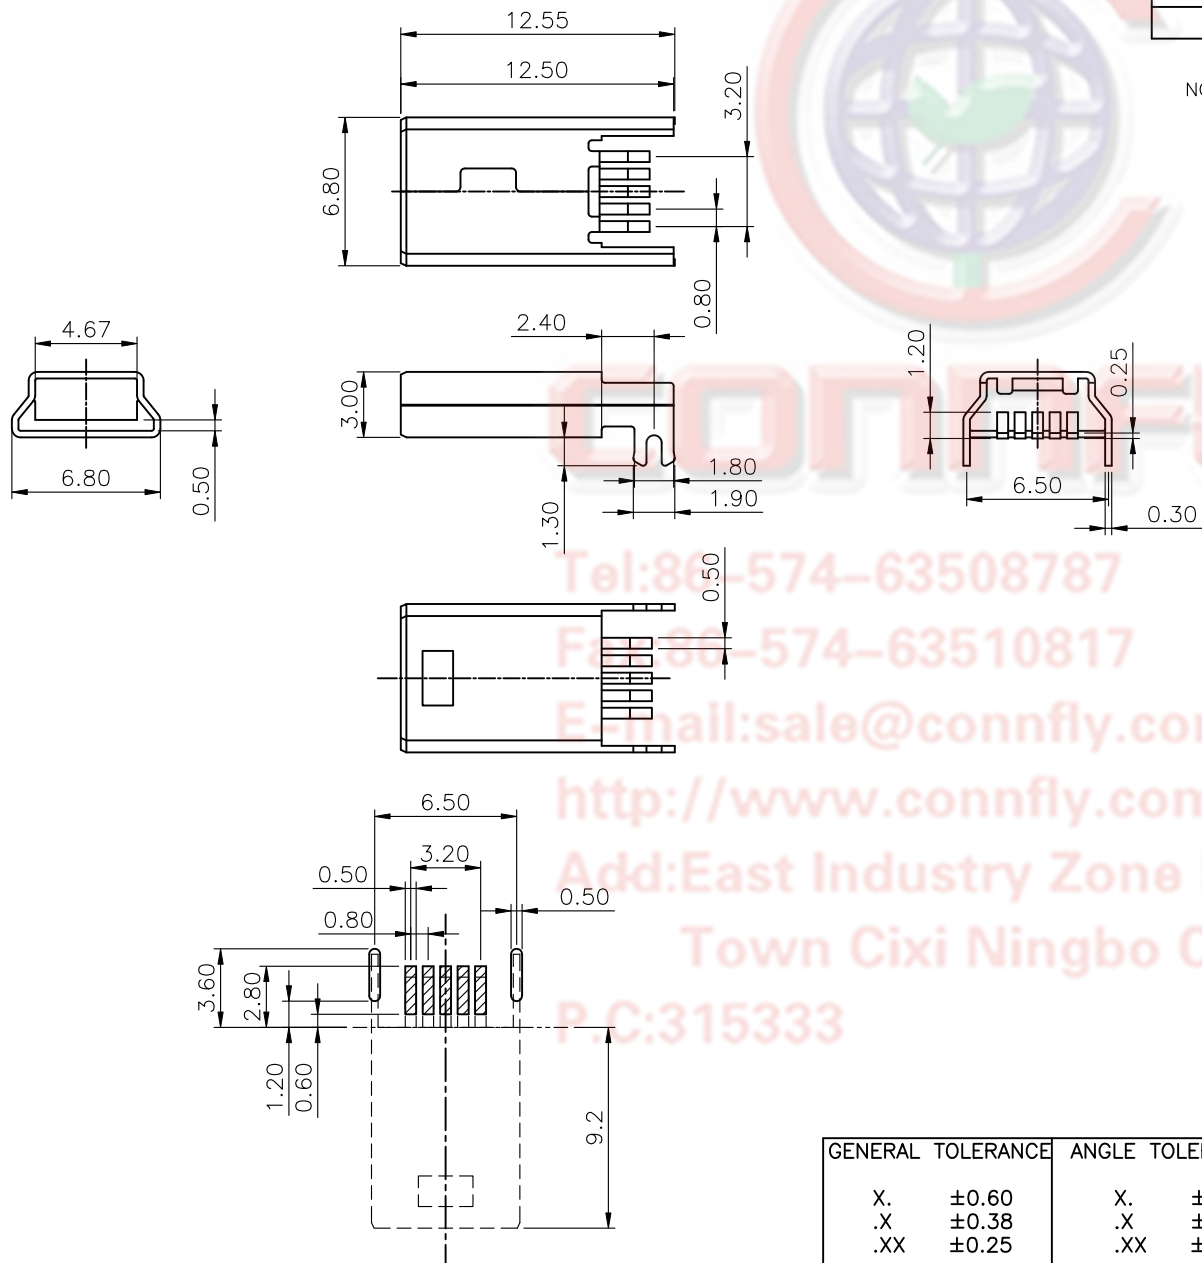

Tel:86-574-63508787
 Fax:86-574-63510817
 E-mail:sale@connfly.com
 http://www.connfly.com
 Add:East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C:315333

RECOMMEND PCB LAYOUT
(TOLERANCE ±0.05)

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION		TITLE	
X. ±0.60	X. ±5°	UNITS	mm	MINI USB 5PIN B TYPE MALE	
.X ±0.38	.X ±3°	SHEET SIZE	A4	SERIES DS1105-03 SERIES	
.XX ±0.25	.XX ±2°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
DRAWING TYPE	CUSTOMER				
SCALE	1:1				SHEET
DRAWING NO.	C-DS1105-03-XXXX-A				