
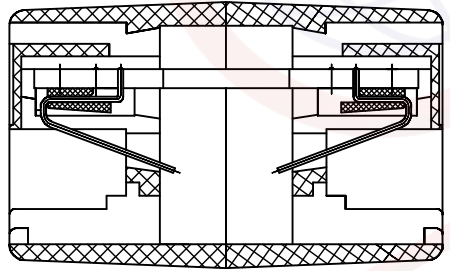
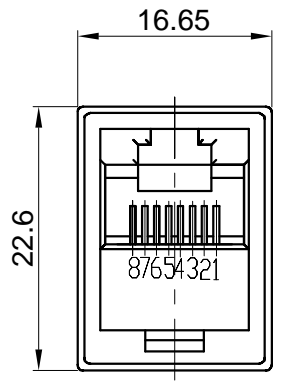


Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QF	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY reserves the right to make changes to the product specifications and drawings without notice. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

- 1 Blue 1
 - 2 Brown 2
 - 3 Red 3
 - 4 Black 4
 - 5 Yellow 5
 - 6 Green 6
 - 7 Orange 7
 - 8 White 8
- Connection

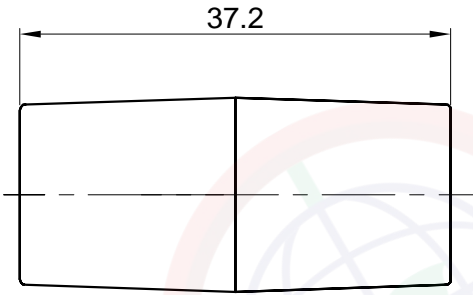

(Series Image-Reference Only)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 08/26/16'		
B	DRAWING UPDATE	JLZ 08/19/23'		

Notes:

1. Electrical Characteristics:
 - 1.1 Contact Resistance: 100mΩ Max.
 - 1.2 Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
 - 1.3 Insulation Resistance: 1000MΩ Min.
 - 1.4 Current Rating:0.5A.
 - 1.5 Voltage Rating:125V AC rms.
2. Environment Characteristics:
 - 2.1 Temperature: -40°C~+85°C.
3. Materials:
 - 3.1 Contact Material: Copper Alloy.
 - 3.2 Contact Plating: Gold Plating Over Nickel.
 - 3.3 Insulator Materials: ABS,Black or Ivory.
4. Product Number Code:

DS1134-08 - X X X X X





- Housing Material
A:ABS
- Housing Color
B:Black
V:Ivory
- Contact Plating
8:Gold Flash
C:3u"Au
- No.Of Contacts
8:8p8c
- Connector Type
S:1 to 1

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	PCB JACK 8P8C Adaptor(1T01)	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1134-08 SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD			
SCALE		1:1					
DRAWING NO.		C-DS1134-08-XXXXX-B					

Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QF	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY reserves the right to make changes to the product design and specifications without notice. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 08/26/16'		
B	DRAWING UPDATE	JLZ 08/19/23'		

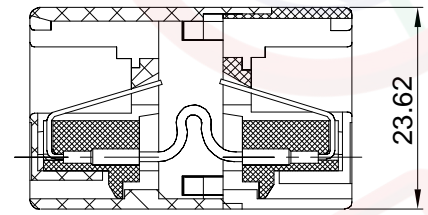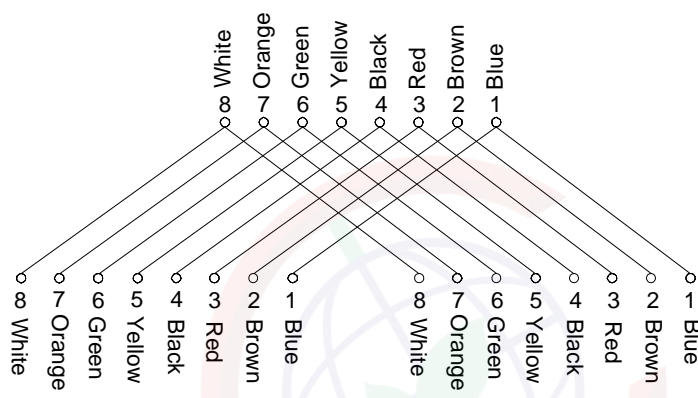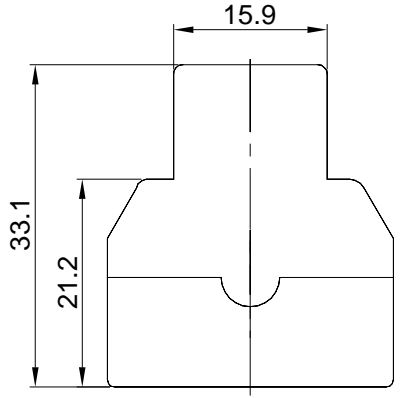

(Series Image-Reference Only)

Notes:

- Electrical Characteristics:
 - Contact Resistance: 100mΩ Max.
 - Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
 - Insulation Resistance: 1000MΩ Min.
 - Current Rating:0.5A.
 - Voltage Rating:125V AC rms.
- Environment Characteristics:
 - Temperature: -40°C~+85°C.
- Materials:
 - Contact Material: Copper Alloy.
 - Contact Plating: Gold Plating Over Nickel.
 - Insulator Materials: ABS,Black or Ivory.
- Product Number Code:

DS1134-08 - X X X X X

- Housing Material
A:ABS
- Housing Color
B:Black
V:Ivory
- Contact Plating
8:Gold Flash
C:3u"Au
- No.Of Contacts
8:8p8c
- Connector Type
Y:1 to 2

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	PCB JACK 8P8C Adaptor(1T02)	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1134-08 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNELY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	2 OF 2				
DRAWING NO.		C-DS1134-08-XXXXX-B					