


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 03/22/18'		
B	DRAWING UPDATE	JLZ 10/08/24'		

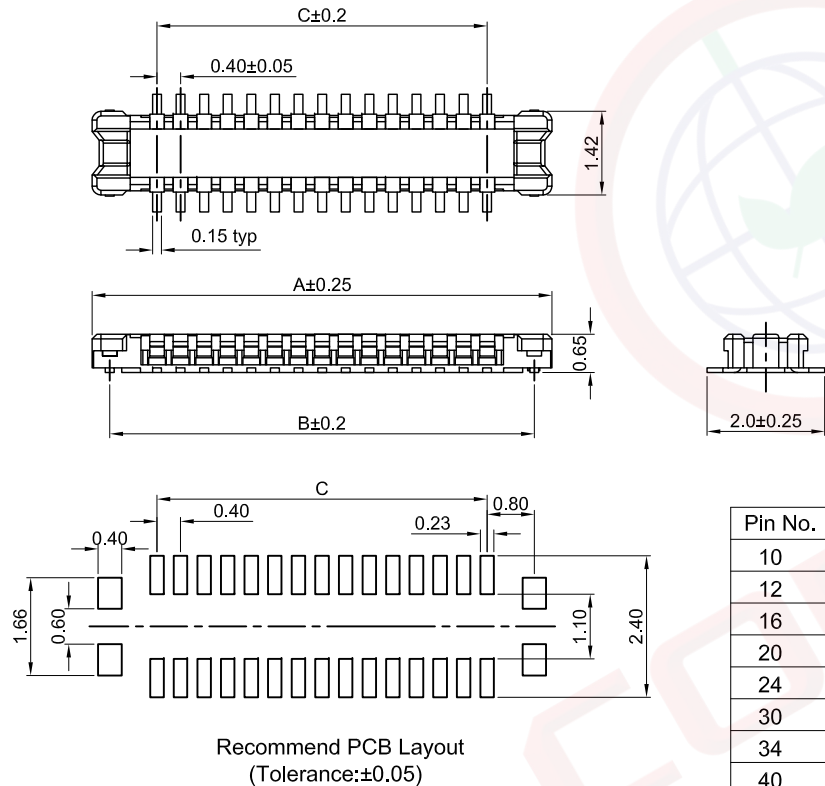

Pin No.	A	B	C
10	3.80	3.20	1.60
12	4.20	3.60	2.00
16	5.00	4.40	2.80
20	5.80	5.20	3.60
24	6.60	6.00	4.40
30	7.80	7.20	5.60
34	8.60	8.00	6.40
40	9.80	9.20	7.60
50	11.80	11.20	9.60

Notes:

Specifications:


1. Contact Resistance: 100mΩ Max.
2. Insulation Resistance: 50MΩ Min.
3. Dielectric Withstanding Voltage: 100V AC(rms) For 1 Minute.
4. Current Rating:0.3A/Pin.
5. Voltage Rating:30V AC rms.
6. Temperature: -40°C~+85°C.

Materials:

1. Contact Material: Copper Alloy.
2. Contact Plating: Gold Plating Over Nickel.
3. Insulator Material: LCP,Black,UL94-V0.

Product Number Code:

DS1151-02 - X X X X X 0 X 0

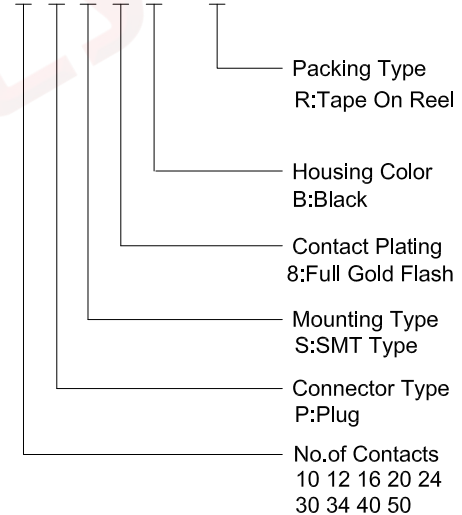

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	0.4mm Board to Board SMT
X.	±0.60	X.	±5°	UNITS	mm		H=0.8mm Series Male Type
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1151-02 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1151-02-XXXXXXX-B					

1 2 3 4 5 6 7 8