



The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1                      2                      3                      4                      5                      6                      7                      8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/09/22'		

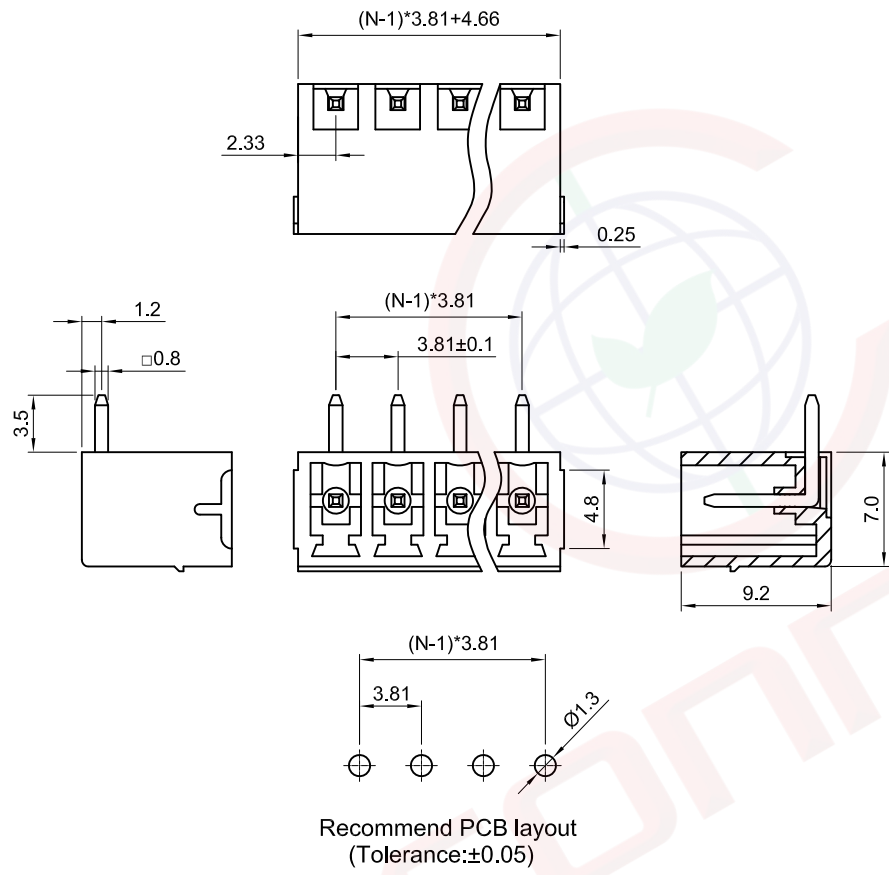

**NOTES:**  
 Standard UL  
 Rated voltage: 300V  
 Rated current: 8A  
 Temp. Range:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$   
 Pitch: 3.81mm  
 Poles: 2~24P  
**Materials:**  
 Contact: Copper Alloy, Tin plated.  
 Insulator: Nylon.  
 Product Number Code:  
 DS1159-06 - X X X  
 Contact plating  
 6: Tin  
 Housing color  
 G: Green L: Blue .....  
 No. of contacts  
 2-24

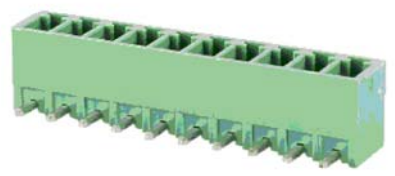

(Series Image-Reference Only)


GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	3.81mm Pluggable Terminal Block R/A Type	
X.	$\pm 0.60$	X.	$\pm 5^{\circ}$	UNITS	mm	SHEET	1 OF 1	
.X	$\pm 0.38$	.X	$\pm 3^{\circ}$	SHEET SIZE	A4	SERIES	DS1159-06 SERIES	
.XX	$\pm 0.25$	.XX	$\pm 2^{\circ}$	<b>晨翔电子有限公司</b> <b>CONNELY CONNELY ELECTRONIC CO. LTD</b>				
DRAWING TYPE		CUSTOMER						
SCALE		1:1	SHEET					
DRAWING NO.		C-DS1159-06-XXX-A						

1                      2                      3                      4                      5                      6                      7                      8



Dept	1	2	3	4	5	6	7	8
Qty								
DC	1							
ED	1							
IE	1							
ISO	1							
PD	1							
R&D	1							
SD	1							
QA	1							
QC	1							
QF	1							

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 06/09/22'		

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

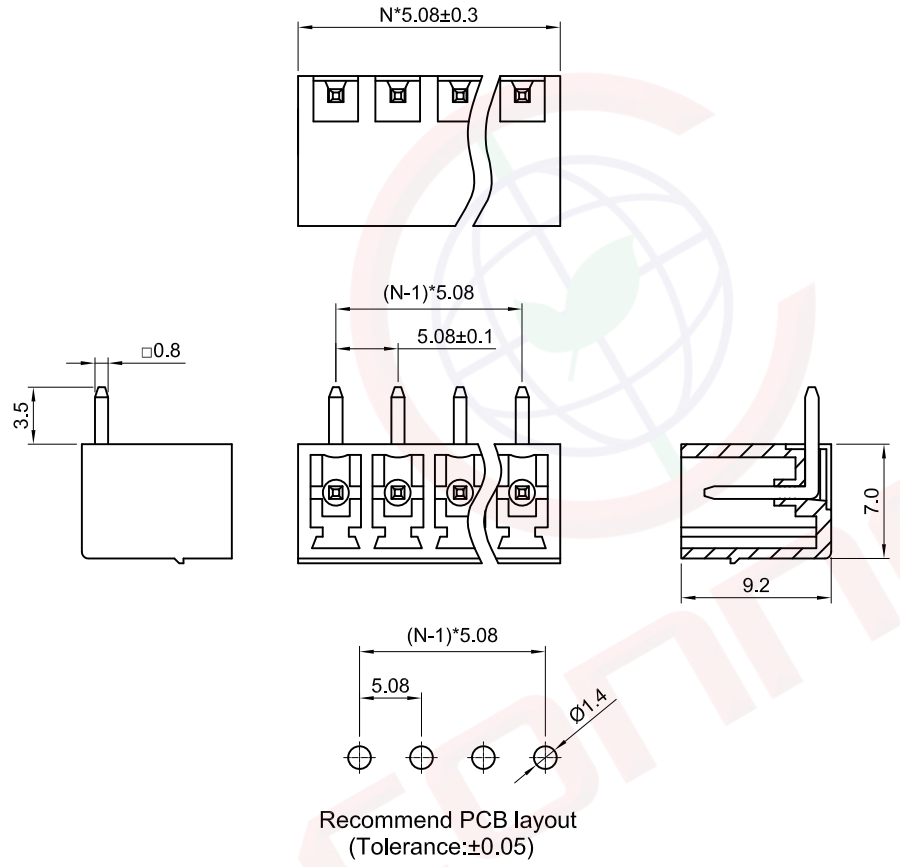

**NOTES:**  
 Standard UL  
 Rated voltage: 300V  
 Rated current: 8A  
 Temp. Range:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$   
 Pitch: 5.08mm  
 Poles: 2~24P  
**Materials:**  
 Contact: Copper Alloy, Tin plated.  
 Insulator: Nylon.  
 Product Number Code:

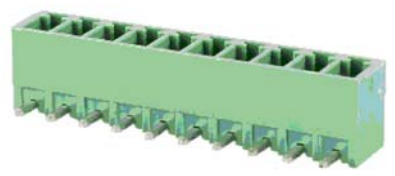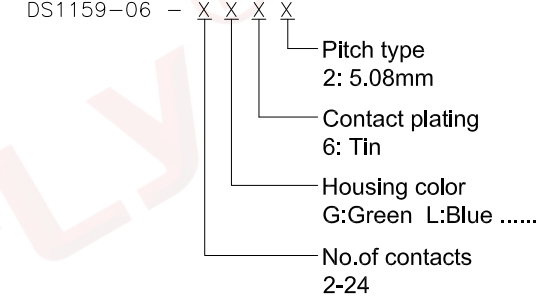

(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	5.08mm Pluggable Terminal Block R/A Type	
X.	$\pm 0.60$	X.	$\pm 5^{\circ}$	UNITS	mm	SHEET	1 OF 1	
.X	$\pm 0.38$	.X	$\pm 3^{\circ}$	SHEET SIZE	A4	SERIES	DS1159-06 SERIES	
.XX	$\pm 0.25$	.XX	$\pm 2^{\circ}$	<b>晨翔电子有限公司</b> <b>CONNELY CONNELY ELECTRONIC CO. LTD</b>				
DRAWING TYPE		CUSTOMER						
SCALE		1:1						
DRAWING NO.		C-DS1159-06-XXXX-A						