


Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	WPY 10/16/24'		

The information provided herein is from CONNFLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNFLY or its affiliates. Unauthorized use or modification is strictly prohibited without prior written consent from CONNFLY. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNFLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

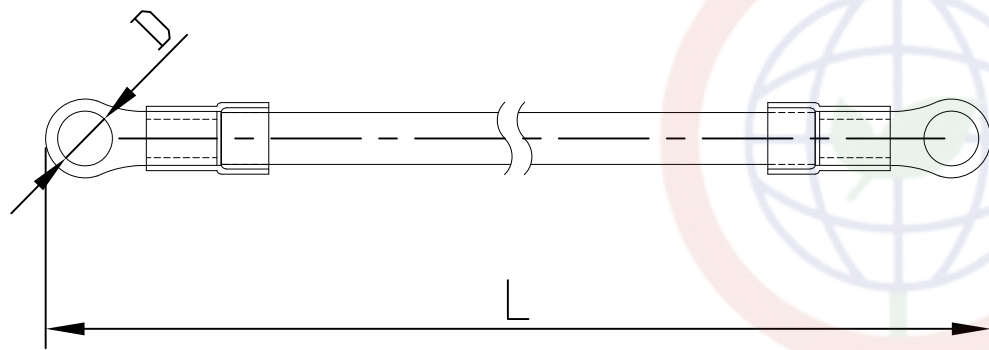

Support customized sizes and lengths

Notes:
 1.3C rated voltage range: 450/750V.
 2.working temperature: -20 °C -100 °C .
Material:
 1.Ire core material: Oxygen free copper.
 2.Sheath material: Environmentally friendly PVC rubber.
 3.Protection level: UL94V-0.

Product Number Code:

DS1162-74 - X X X X

- Circular hole size (DimD):
4:Ø4 5:Ø5 6:Ø6 8:Ø8
- Line length (DimL):
10:10 15:15 20:20
25:25 30:30...
- Cable Size:
4:4 6:6
- Insulator Color:
YG: Yellow & Green



GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	Grounding wire for solar photovoltaic panels	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1162-74 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.		C-DS1162-74-XXXX-A						