

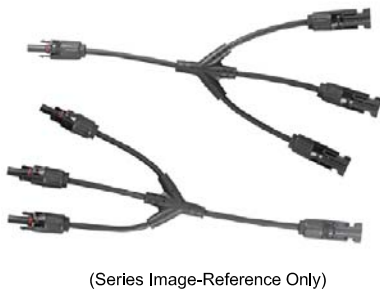
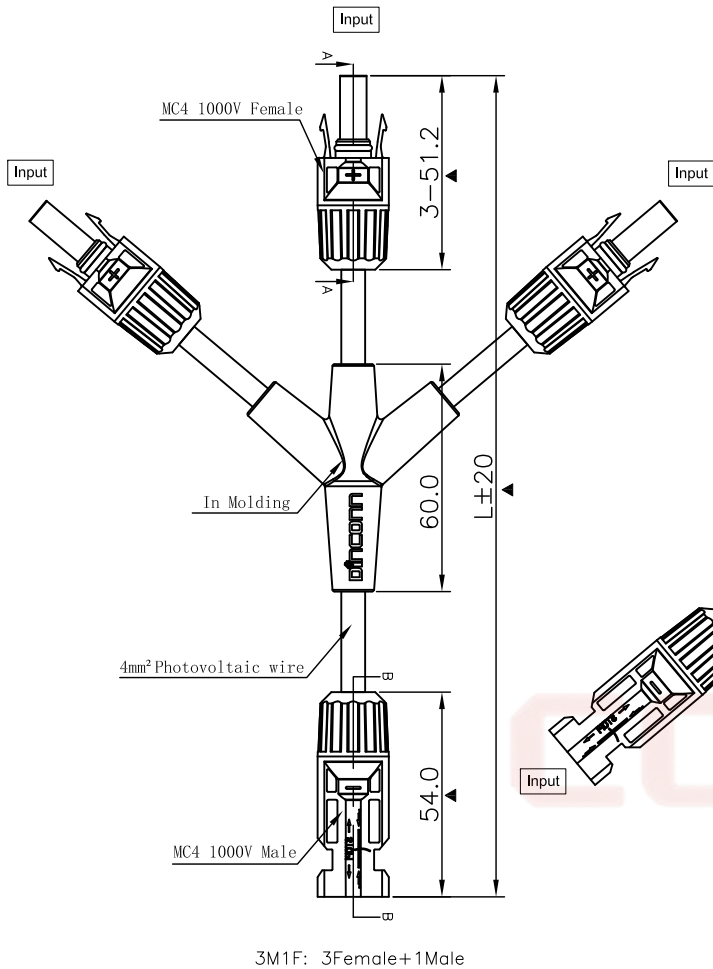
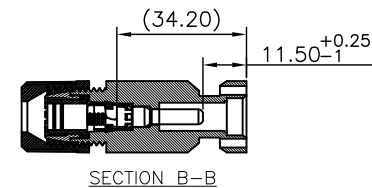


Dept
Qty
DC 1
ED 1
IE 1
ISO 1
PD 1
R&D 1
SD 1
QA 1
QC 1
QE 1

CONNFLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights are strictly prohibited without prior written consent from CONNFLY. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNFLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.



(Series Image-Reference Only)

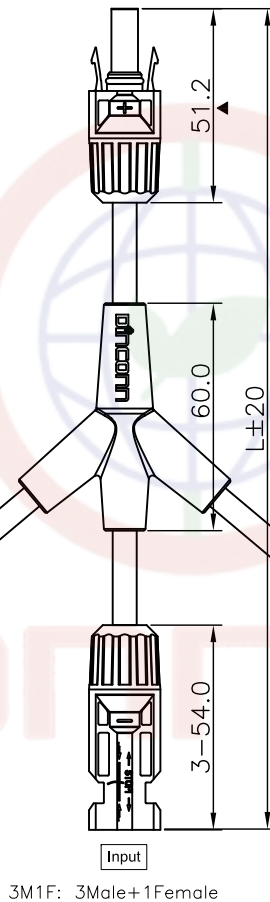

Notes:
Specifications:
1. Contact Resistance: 0.5Ω Max.
2. Current Rating: 30A.
3. Voltage Rating: 1000V AC rms.
4. Temperature: -40°C~+90°C.
Materials:
1. Insulating material: Thermoplastic Black.
2. Contact material: Red Copper, Tin plated.
Product Number Code:
DS1194-02 - X X X X X
Wire length(Dim L)
350: 350mm
.....
Cable color
B: Black
R: Red
Contact plating
6: Tin
Housing color
B: Black
No. of contacts
3F1M: 3Female+1Male
3M1F: 3Male+1Female
1T3: 3F1M+3M1F

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1194-02-XXXXX-B		

PROJECTION	TITLE	Photovoltaic DC "Y" Branch Line - 1 to 3	
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1194-02 SERIES
 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			