


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays in exercising such rights does not constitute a waiver of such rights.

A/B OR C/D:Customer length available
 N:Number of contacts/2 (Double row)
 N:Number of contacts (Single row)
 Pin length 17mm Max.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 03/07/18'	HZW 03/07/18'	LJC 03/07/18'
B	DRAWING UPDATE	JLZ 12/15/18'		

NOTES:



Specifications:

1. Contact resistance: 20mΩ Max.
2. Insulation resistance: 1000MΩ Min.
3. Dielectric withstanding voltage: 600V AC(Rms) for 1 minute.
4. Current rating:3A.
5. Voltage rating:250V AC Rms.
6. Temperature: -40°C~+105°C.


Materials:

1. Contact material: Copper alloy.
2. Contact plating: Gold plating over nickel.
3. Insulator material: Thermoplastic,Black,UL94-V0.

Product number code:

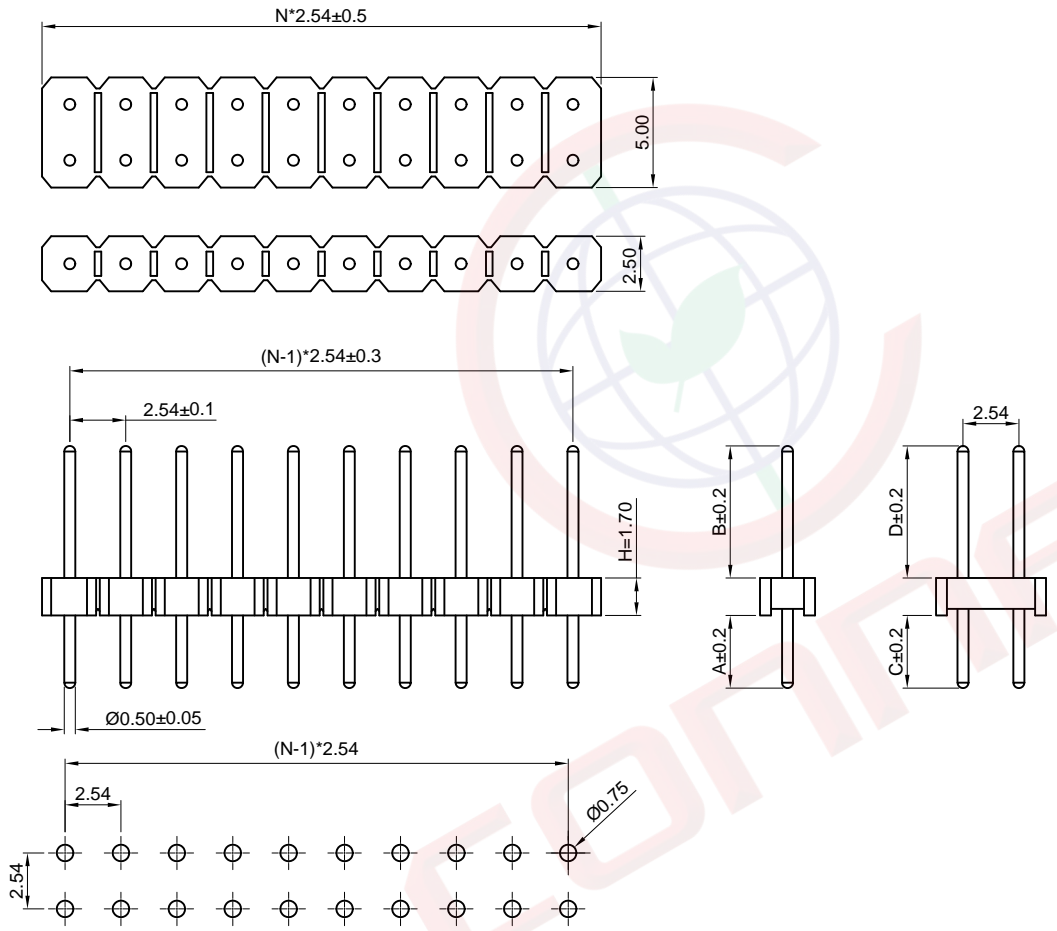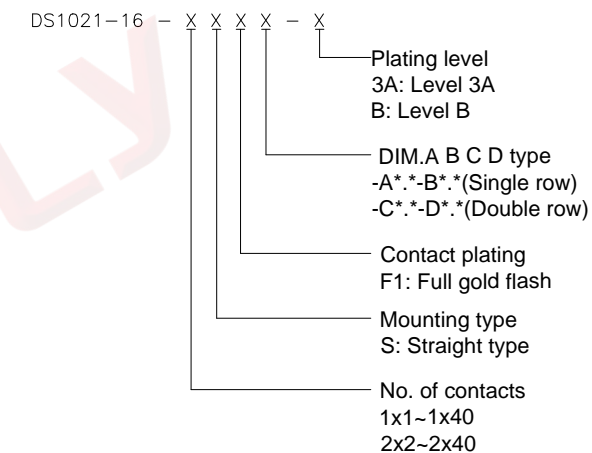

Recommended PCB layout

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	± 0.60	X.	$\pm 5^\circ$		2.54mm Pin Header V/T Type
.X	± 0.38	.X	$\pm 3^\circ$	UNITS	mm
.XX	± 0.25	.XX	$\pm 2^\circ$	SHEET SIZE	A4
DRAWING TYPE				CUSTOMER	SERIES
SCALE				1:1	DS1021-16 SERIES
DRAWING NO.				C-DS1021-16-XXXX-X-B	

