

Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QF	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 05/04/08'		LJC 05/04/08'
B	ADD PLATING LEVEL	JLZ 09/25/14'		LJC 09/25/14'
C	DRAWING UPDATE	JLZ 12/22/18'		

- NOTES:
- Specifications:
1. Contact resistance: 20mΩ Max.
 2. Insulation resistance: 1000MΩ Min.
 3. Dielectric withstanding voltage: 600V AC(RMS) for 1 minute.
 4. Current rating:3A.
 5. Temperature: -40°C~+105°C.


- Materials:
1. Contact material: Copper alloy.
 2. Contact plating: Gold plating over nickel.
 3. Insulator material: High temp,Black,UL94-V0.

Product number code:
 DS1022-05 - X X X X - X

- Plating level(For gold only)
3A: Level 3A B: Level B
- Dim A.B.C type
1: Type 1
or A*.*-B*.*-C*.*
- Contact plating
8: Full gold flash
6: Full tin
- Housing color
B: Black
- No.of contacts
1x3

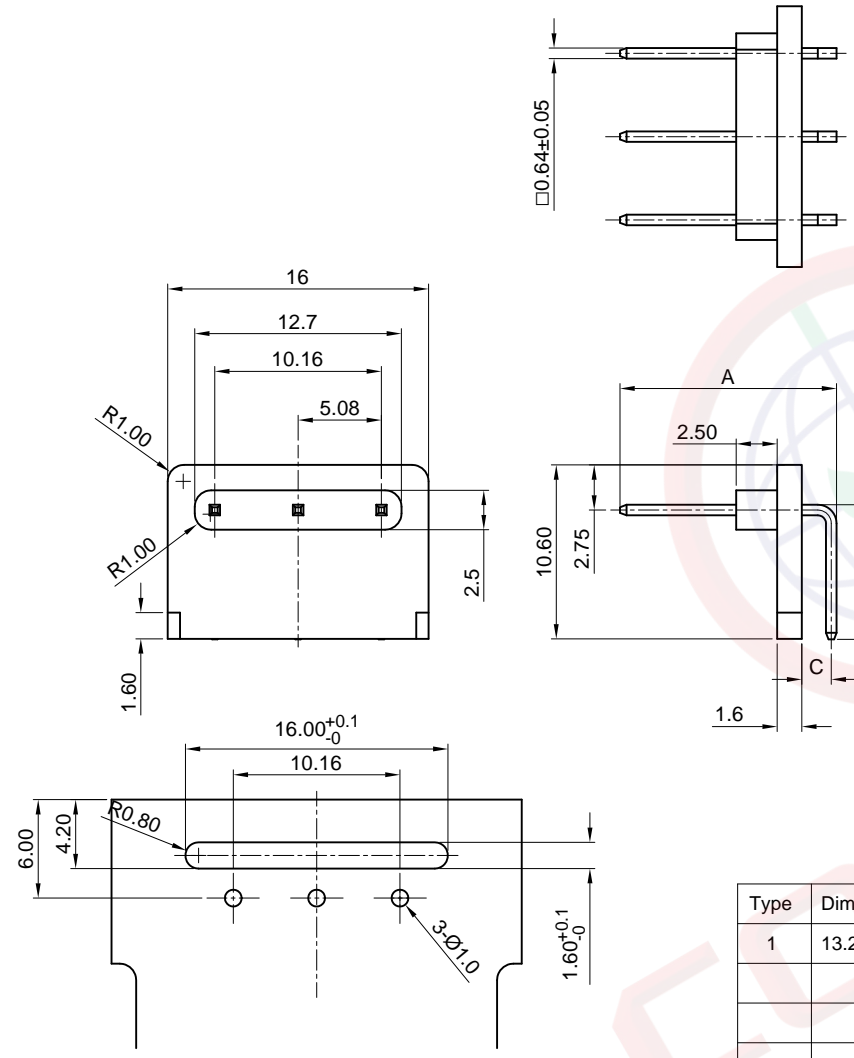

Recommend PCB Layout
(Tolerance:±0.05)



(Series Image-Reference Only)

Type	Dim A	Dim B	Dim C
1	13.20	8.20	1.80

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	PIN HEADER PITCH 5.08mm	
X.	±0.60	X.	±5°	UNITS	mm	SPECIAL R/A TYPE		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1022-05 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNELY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE		1:1						
DRAWING NO.		C-DS1022-05-XXXX-X-C		SHEET		1 OF 1		