

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 03/01/18'		
B	DRAWING UPDATE	JLZ 05/15/19'		


NOTES:

- CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 600V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - CURRENT RATING:3A.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+105°C.
- MATERIALS
 - CONTACT MATERIAL: COPPER ALLOY.
 - CONTACT PLATING: GOLD
 - INSULATOR MATERIALS: PBT,BLACK,UL94-V0.


4. PRODUCT NUMBER CODE:

DS1023-52 - X X X X X X - X



- X: Kink Support
- X: W/O Kink
- N/A Code: W/ Kink
- Packing Type
- B: Tube
- T: Tray
- Housing Color
- B: Black
- Contact Plating
- 8: Full Gold Flash
- Mounting Type
- V: V/T Type
- Connector Type
- S: Socket
- No.Of Contacts
- 2x2-2x20

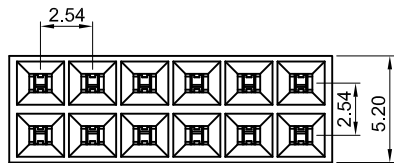

3D VIEW

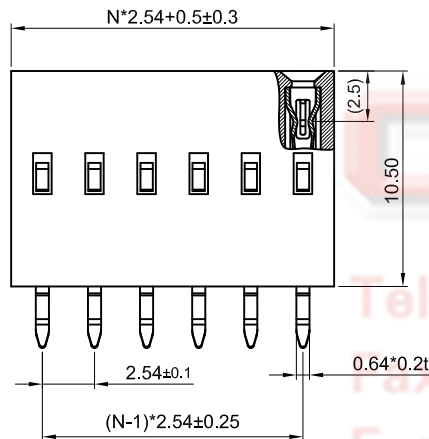

N=No.OF CONTACTS/2

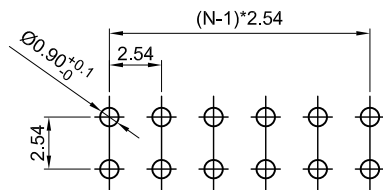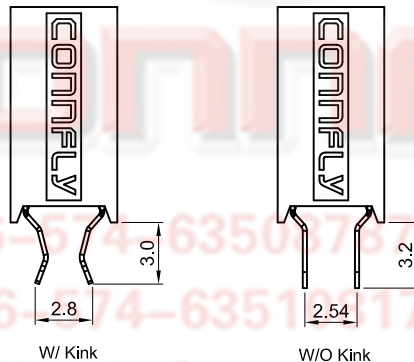

RECOMMEND PCB LAYOUT
(TOLERANCE ±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1023-52-XXXXXX-X-B		

PROJECTION		TITLE	2.54mm Female Header V/T H=10.5mm Big Window Type
UNITS	mm	SERIES	DS1023-25 SERIES

晨翔电子有限公司
CONNELY CONNELY ELECTRONIC CO. LTD

1 2 3 4 5 6 7 8