
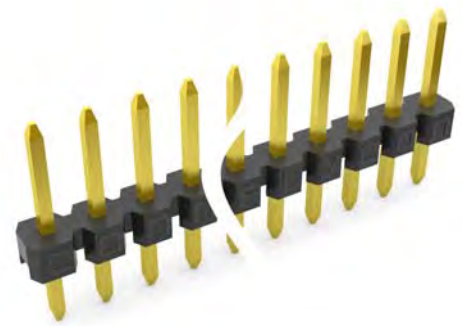


Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY reserves the right to make changes to the product specifications and drawings without notice. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 04/02/19'		

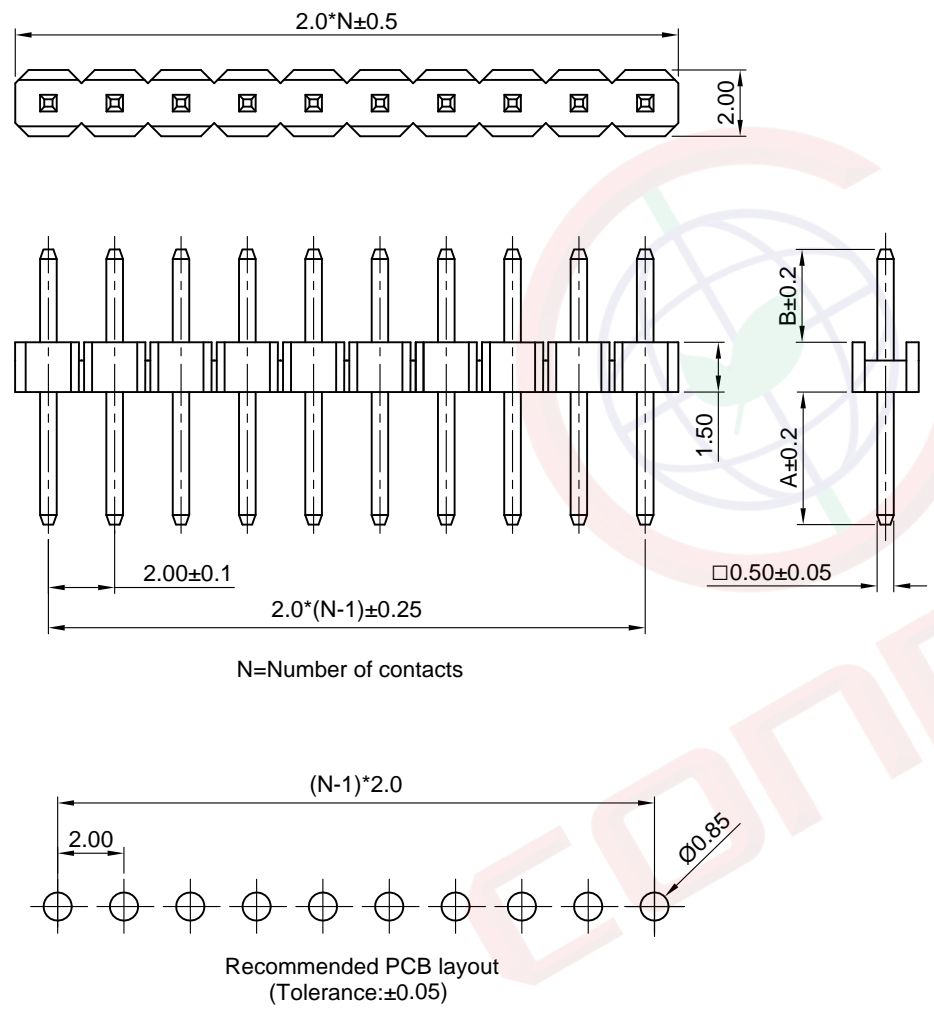

(Series Image-Reference Only)

Notes:

Specifications:

1. Contact Resistance: 20mΩ Max.
2. Insulation Resistance: 1000MΩ Min.
3. Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
4. Current Rating:1.5A.
5. Temperature: -40°C~+105°C.

Materials:

1. Contact Material: Copper Alloy.
2. Contact Plating: Gold Plating Over Nickel.
3. Insulator Material: High temp,Black,UL94-V0.

Product Number Code:

DS1025-14 - X X X X X X - X

- Plating level  
3A: Level 3A  
B: Level B
- Dim.A B type  
A4.0-B2.8  
or A\*.\*-B\*.\*
- Mounting type  
V: V/T type
- Housing color  
B: Black
- Contact plating  
8: Full gold flash
- Connector type  
P: Plug
- No.of contacts  
1x1~1x40

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2.00 Pin Header V/T Type	
X.	±0.60	X.	±5°	UNITS	mm	Single Row H=1.50mm		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1025-14 SERIES	
.XX	±0.25	.XX	±2°	<b>晨翔电子有限公司</b> <b>CONNFLY ELECTRONIC CO. LTD</b>				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.		C-DS1025-14-XXXXXX-X-A						