

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 01/02/18'	~	

NOTES:


- MATERIAL
  - INSULATOR:THERMOPLASTIC(UL 94V-0).
  - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
  - CURRENT RATING:1.0 Amp.
  - INSULATION RESISTANCE:1000MΩ Min.
  - DIELECTRIC WITHSTANDING:300VAC.
  - CONTACT RESISTANCE:20mΩ Max.
  - OPERATING TEMPERATURE:-40°C TO+105°C.

3. PART NUMBER: DS1064-18




4. PRODUCT NUMBER CODE:

DS1064-18 - X X X X X X - X

- Plating Level  
3A: 3A Level
- Pick Up Support  
S: W/ Pick Up  
X: W/O Pick Up
- Packing Type  
B: Tube  
R: Tape On Reel  
T: Tray
- Housing Color  
B:Black
- Contact Plating  
8: Full Gold Flash  
6: Full Tin
- Mounting Type  
S: SMT Type
- No.of Contacts  
10 14 16 20 24 26  
30 32 34 40 44 50  
60 64 80 100

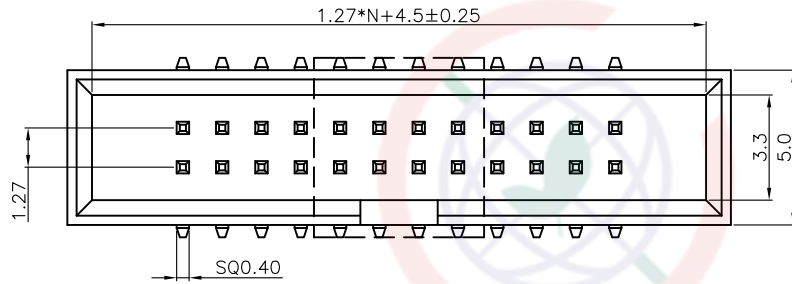

N=No.OF CONTACTS/2

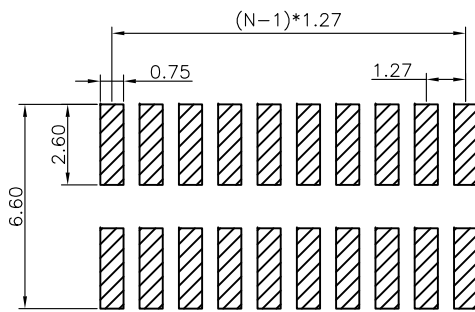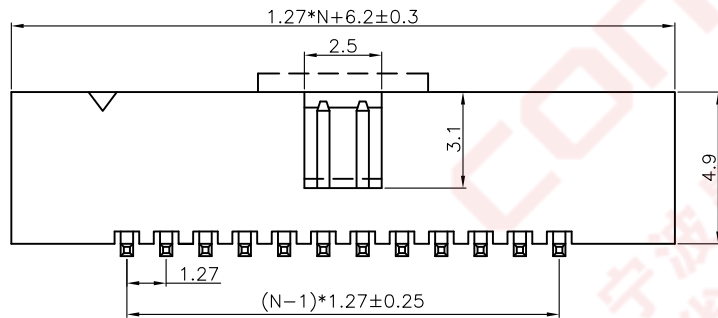

RECOMMEND PCB LAYOUT  
(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	1.27*1.27mm Box Header STM Type H=4.9mm	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1064-18 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.		C-DS1064-18-XXXXX-X-A						