

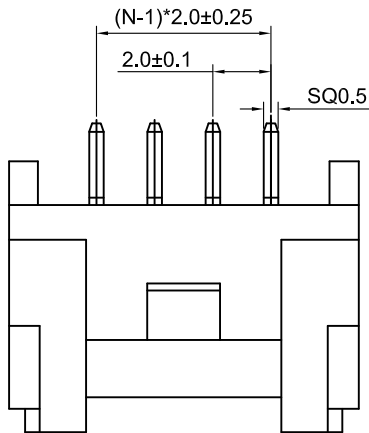


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 09/29/16'	HZW 09/29/16'	LJC 09/29/16'
B	DRAWING UPDATE	JLZ 08/05/19'		



NOTES:

1. MAIN SPECIFICATIONS


- . Housing material: High temp, Thermoplastic
- . Contact material: Copper Alloy
- . Rated voltage: 125V
- . Rated current: 2A
- . Contact resistance: 30mΩ Max
- . Insulation resistance: 1000MΩ Min
- . Withstanding voltage: 500V, AC 1 minute
- . Temperature range: -25 ~ +85°C
- . Recommend PC board thickness: 1.6mm

2. PRODUCT NUMBER CODE:

DS1066-06 - X X X X X X

- Packing type
A: Polybag
B: Tube
R: Tape on reel
- Contact Plating
6: Tin
V: Ivory
- Mounting type
R: Horizontal type
- Connector type
M: Male
- No. of contact
2~16

N=No. of contact

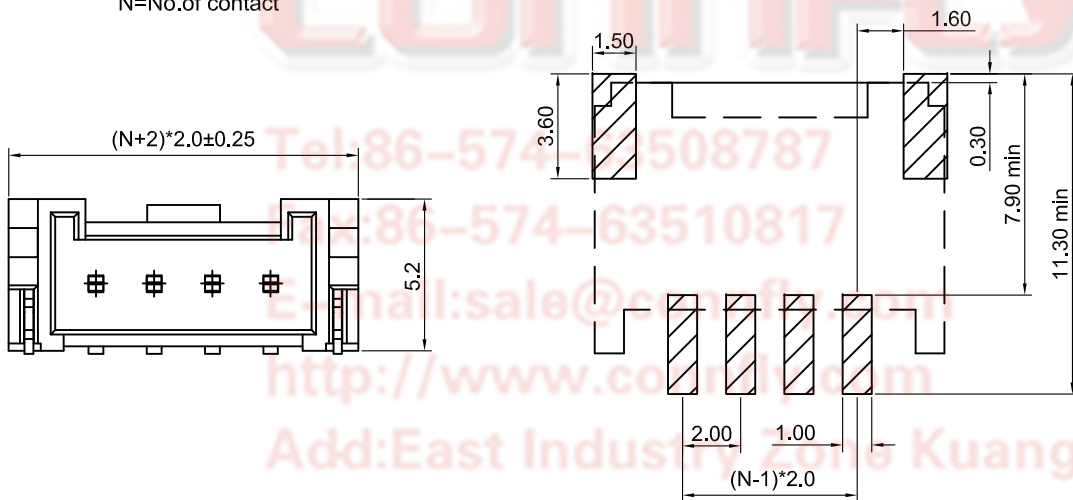



RECOMMEND PCB LAYOUT

CONNELY
 Tel: 86-574-63510817
 Fax: 86-574-63510817
 E-mail: sale@connely.com
 http://www.connely.com
 Add: East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C: 315333

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 2
DRAWING NO.	C-DS1066-06-XXXXX-B		

PROJECTION		TITLE	2.00mm Wafer SMT Horizontal Type	
UNITS	mm	SHEET	A4	
SHEET SIZE	A4	SERIES	DS1066-06 SERIES	


晨翔电子有限公司
CONNELY CONNELY ELECTRONIC CO. LTD


1 2 3 4 5 6 7 8

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 09/29/16'	HZW 09/29/16'	LJC 09/29/16'
B	DRAWING UPDATE	JLZ 08/05/19'		

Dept
 Qty
 DC 1
 ED 1
 IE 1
 ISO 1
 PD 1
 R&D 1
 SD 1
 QA 1
 QC 1
 QF 1

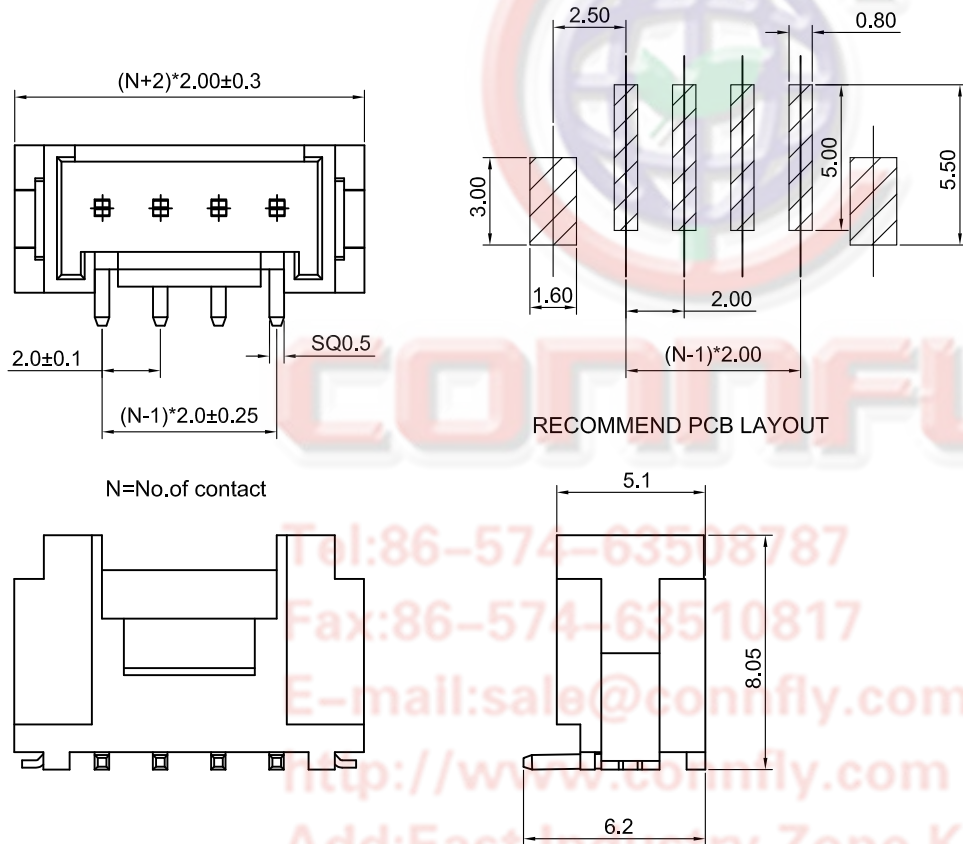

NOTES:

1. MAIN SPECIFICATIONS

- . Housing material: High temp, Thermoplastic
- . Contact material: Copper Alloy
- . Rated voltage: 125V
- . Rated current: 2A
- . Contact resistance: 30mΩ Max
- . Insulation resistance: 1000MΩ Min
- . Withstanding voltage: 500V, AC 1 minute
- . Temperature range: -25 ~ +85°C
- . Recommend PC board thickness: 1.6mm

2. PRODUCT NUMBER CODE:

DS1066-06 - X X X X X X

- X: Packing type
A: Polybag
B: Tube
R: Tape on reel
- X: Contact Plating
6: Tin
- X: Housing Color
V: Ivory
- X: Mounting type
S: Upright type
- X: Connector type
M: Male
- X: No. of contact
2~16

Tel: 86-574-63508787
 Fax: 86-574-63510817
 E-mail: sales@connfly.com
 http://www.connfly.com
 Add: East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C: 315333

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°		2.00mm Wafer SMT Upright Type
.X	±0.38	.X	±3°	mm	
.XX	±0.25	.XX	±2°	A4	SHEET SIZE
DRAWING TYPE		CUSTOMER		SERIES DS1066-06 SERIES	
SCALE		1:1	SHEET		2 OF 2
DRAWING NO.		C-DS1066-06-XXXXX-B			

晨翔电子有限公司
CONNFLY CONNELY ELECTRONIC CO. LTD

1 2 3 4 5 6 7 8