


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 11/07/14'	~	

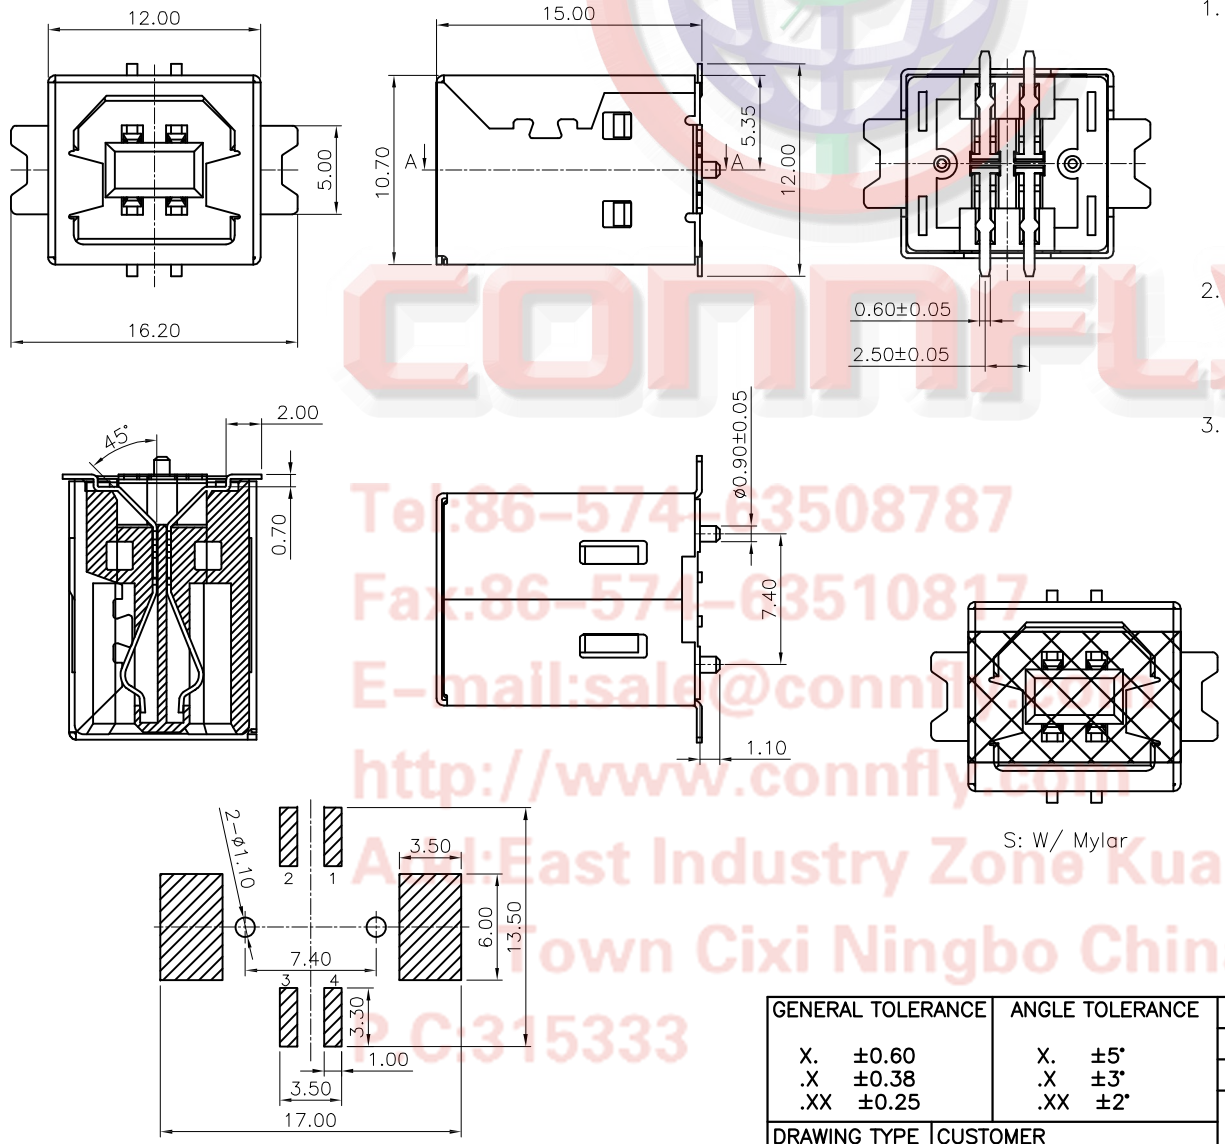

- NOTES:
- SPECIFICATIONS:
    - CONTACT RESISTANCE: 30mΩ(max.) INITIAL FOR VBUS AND GND CONTACTS. 50mΩ(max.) INITIAL FOR ALL OTHER CONTACTS.
    - INSULATOR RESISTANCE: 100MΩ min. AT 100V DC.
    - CURRENT RATING: 1.8A FOR VBUS PIN AND ITS CORESPONDING GND PIN. 0.25A (MIN.) FOR ALL OTHER CONTACTS
    - VOLTAGE RATING: 30V AC/DC.
    - DIELECTRIC STRENGTH: AC 100V FOR 1 Minute.
    - OPERATING TEMPERATURE: -40°C ~ +105°C.

- MATERIALS:
  - HOUSING: THERMOPLASTIC (UL 94-0).
  - CONTACT: COPPER ALLOY
  - SHELL: COPPER ALLOY.

3. PRODUCT NUMBER CODE:

DS1099-03 - X X X X X

- PACKING TYPE
- R: Tape On Reel
- T: Tray
- MYLAR SUPPORT
- S: W/ Mylar
- X: W/O Mylar
- CONTACT PLATING
- 0: Selective Gold Flash
- 03: Selective Gold 3u"
- 30: Selective Gold 30u"
- SHELL PLATING
- N: Nickel
- COLOR OF HOUSING:
- W: White
- B: Black

Tel: 86-574-63508787  
 Fax: 86-574-63510817  
 E-mail: sale@connfly.com  
 http://www.connfly.com  
 East Industry Zone KuangYan  
 Town Cixi Ningbo China  
 C: 315333

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	USB B TYPE FEMALE SMT TYPE	
X.	±0.60	X.	±5°	mm			
.X	±0.38	.X	±3°	A4	SERIES	DS1099-03 SERIES	
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		<b>晨翔电子有限公司</b> <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>			
SCALE		1:1 SHEET 1 OF 1					
DRAWING NO.		C-DS1099-03-XXX-A					