

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 05/18/16'	~	

NOTES:


- 1.1 INSULATOR RESISTANCE: 100MΩ Min. AT 100V DC.
- 1.2 CURRENT RATING: 1.0A FOR PIN1 AND PIN5.
- 1.3 DIELECTRIC STRENGTH: AC 100V FOR 1 Minute.
- 1.4 HOUSING: THERMOPLASTIC (UL 94-0).
- 1.5 CONTACT: COPPER ALLOY
- 1.6 SHELL: COPPER ALLOY
- 1.7 PRODUCT NUMBER CODE:
DS1105-14 - X X X X

PACKING TYPE:
R: Tape on reel
B: Tube


CONTACT PLATED:
O: Selective Gold Flash

SHELL PLATED:
6: Matt Tin
N: Nickel

COLOR OF HOUSING:
B: Black
W: White

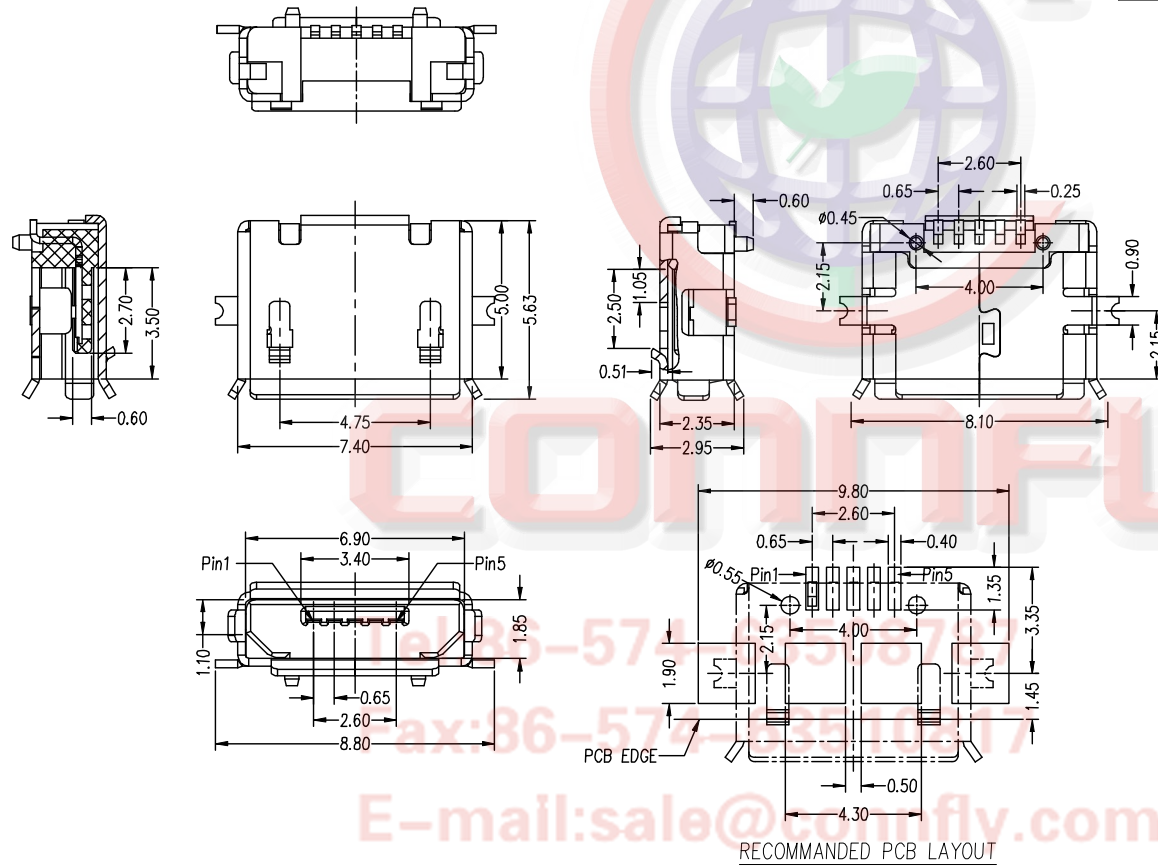

Tel: 86-574-3510117
Fax: 86-574-3510117
E-mail: sale@connfly.com
http://www.connfly.com
Add: East Industry Zone KuangYan
Town Cixi Ningbo China
P.C: 315333

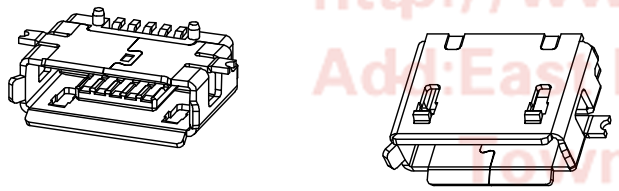

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1105-14-XXXX-A		

PROJECTION	TITLE
	Micro USB AB Type Female 5 Positions SMT W/ Post Type
UNITS	mm
SHEET SIZE	A4
SERIES	DS1105-14 SERIES

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD