


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 05/19/17'	~	

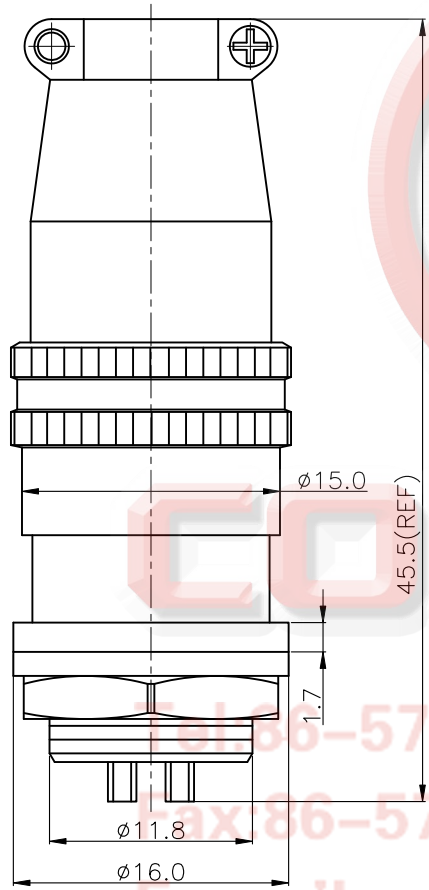

NOTES:








1.SPECIFICATION

- .CURRENT RATING: 5A Max.
- .DIELECTRIC WITH STANDING VOLTAGE: 1000V(AC)
- .CONTACT RESISTANCE: 20mΩ Max.
- .INSULATION RESISTANCE: 1000MΩ(DC)Min.

2.PRODUCT NUMBER CODE:

DS1110-13 - X X X X


- SHELL SURFACE FINISHED
N: NICKEL
- CONTACT PLATING
8: FULL GOLD FLASH
- COLOR OF HOUSING:
L: BLUE
- No. OF CONTACTS
02: 2pin 03: 3pin
04: 4pin 05: 5pin
06: 6pin 07: 7pin



GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.60	X. ±5°
.X ±0.38	.X ±3°
.XX ±0.25	.XX ±2°

PROJECTION	TITLE
UNITS: mm	Micro Jack Total Length=45.5mm Ref Pin ø1.0mm Push Pull Type
SHEET SIZE: A4	SERIES: DS1110-13 SERIES

DRAWING TYPE	CUSTOMER
SCALE: 1:1	SHEET: 1 OF 1
DRAWING NO.:	C-DS1110-13-XXX-A


晨翔电子有限公司
CONNFly CONNFly ELECTRONIC CO. LTD