


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 08/23/07'	~	

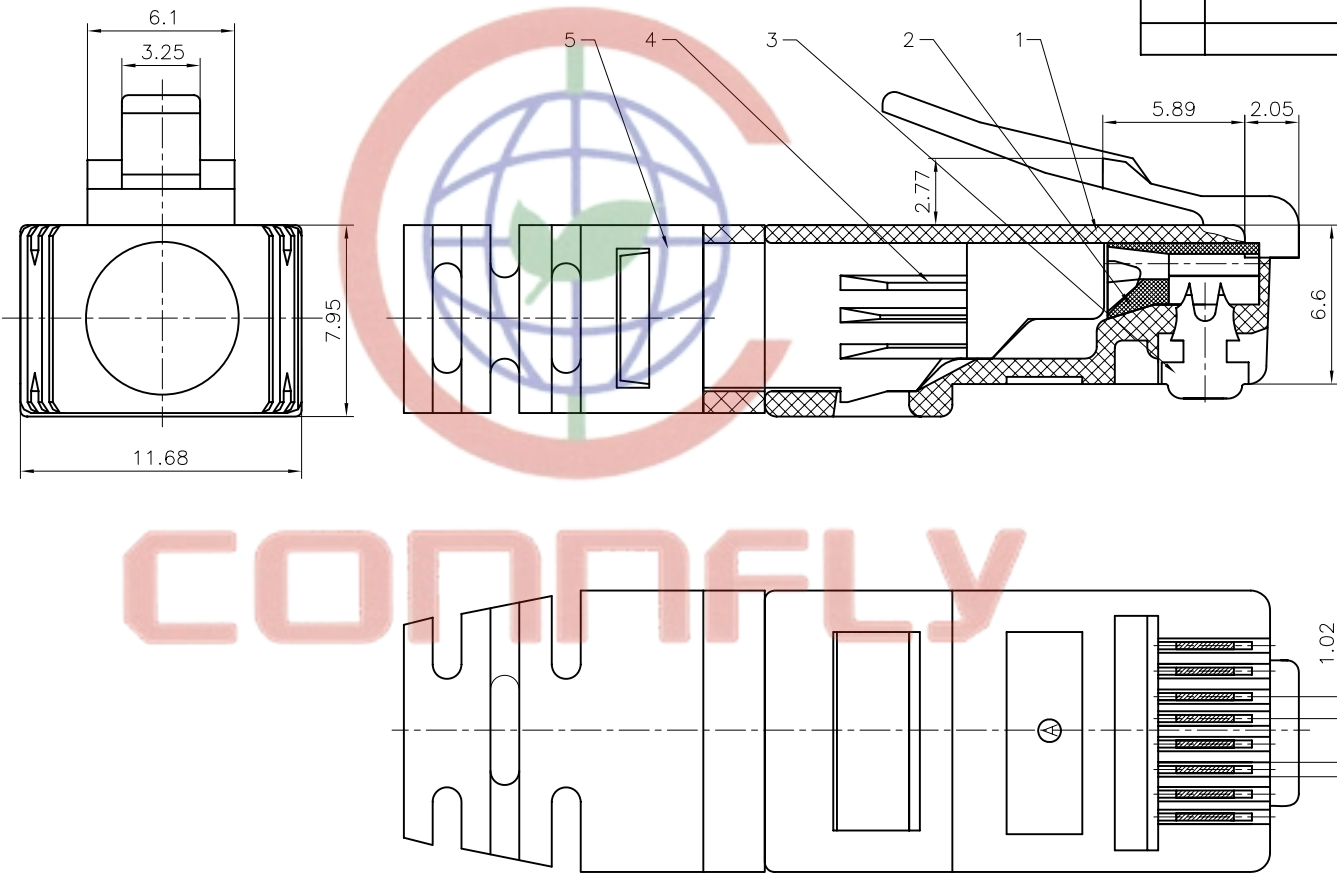

SPECIFICATION

1. Insulation Resistance:1000MΩ Min.
2. Withstand Voltage:500V AC/Minute.
3. Durability:600 Cycles Min.
4. Contact resistance:50mΩ max.
5. Product Number Code:

DS1123-13 - X X X X

- Housing Color
T:Transparent
- Contact Plating
0:Gold Flash 15:15u''Au
3:3u''Au 30:30u''Au
6:6u''Au
- No.Of Contacts
8:8p8c
- Connector Type
P:Plug
- Series No.
DS1123-13

(5)	SR	1	PVC	UL94 V-0 OR 94 V-2
(4)	INSERT	1	PC	UL94 V-0 OR 94 V-2
(3)	BLADE	8	Copper alloy	GOLD PLATING
(2)	COVER	1	PC	UL94 V-0 OR 94 V-2
(1)	HOUSING	1	PC	UL94 V-0 OR 94 V-2
No.	PART NAME	Q'TY	MATERIAL	REMARK

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5'
.X	±0.38	.X	±3'
.XX	±0.25	.XX	±2'

DRAWING TYPE	CUSTOMER	
SCALE	1:1	SHEET 1 OF 1
DRAWING NO.	C-DS1123-13-XXXX	

PROJECTION	TITLE
UNITS mm	PLUG 8P8C WITH COVER & HOOD
SHEET SIZE A4	SERIES DS1123-13 SERIES

Tel: 86-574-63508787
Fax: 86-574-63510817

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD