


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 03/26/06'		


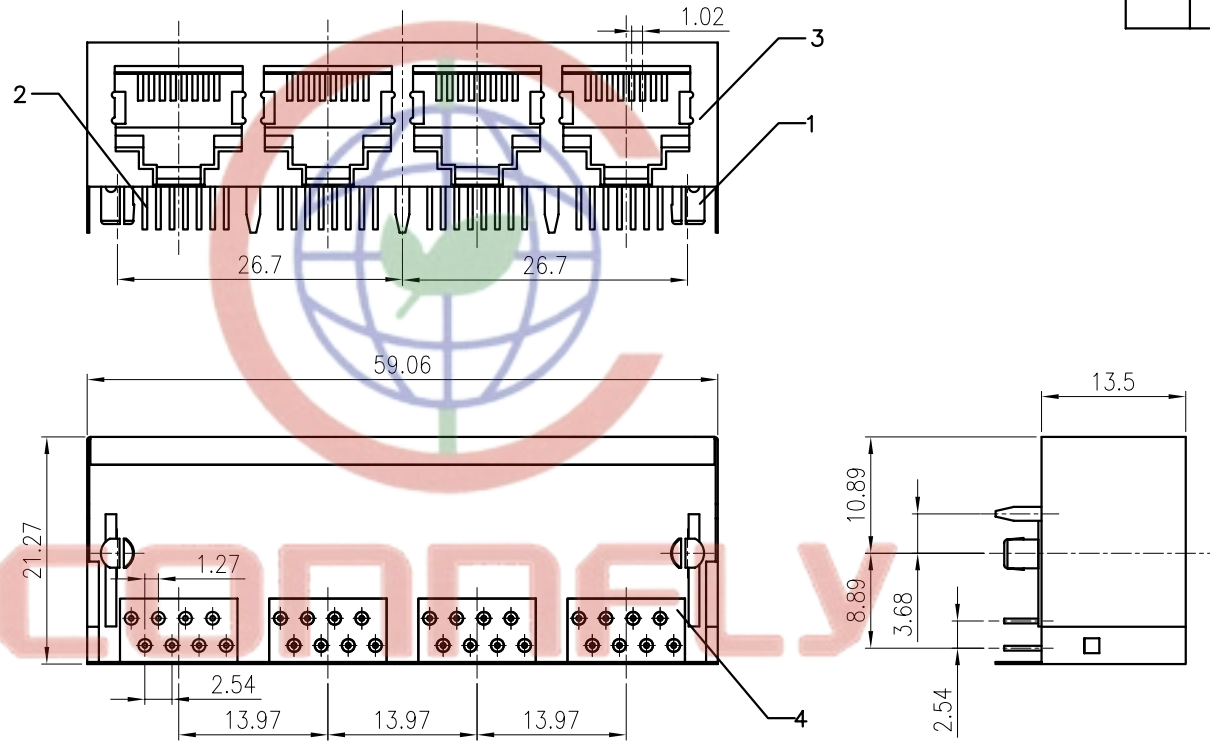


SPECIFICATION

1. Insulation Resistance:1000MΩ Min.
2. Withstand Voltage:500V AC/Minute.
3. Durability:600 Cycles Min.
4. Product Number Code:

DS1129-X X X X X

- Housing Materials  
P:PBT  
N:NYLON
- Housing Color  
B:Black
- Contact Plating  
0:Gold Flash  
3:Selective 3u" Gold (6;15;30)Micro Inch
- No.Of Contacts  
4:8p4c 6:8p6c 8:8p8c
- Connector Type  
S:Socket
- Series No.  
DS1129

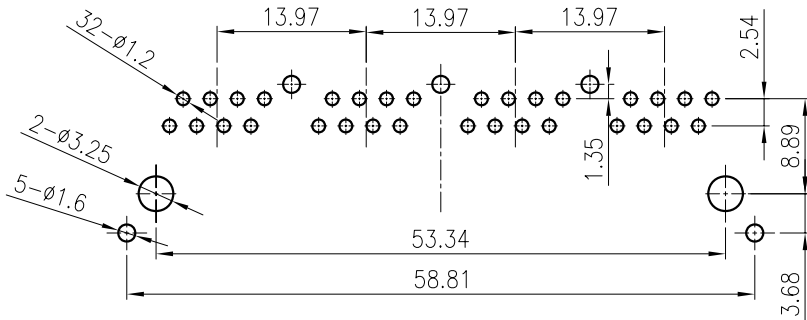

8: 8p8c  
Bottom View


Tel: 86-574-63510817  
Fax: 86-574-63510817

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

(4)	COVER	4	PBT OR NYLON	UL94 V-0 OR 94 V-2
(3)	SHIELDING	1	COPPER ALLOY WITH NICKEL PLATED	0.25mm THICKNESS
(2)	PIN		PHOSPHOR BRONZE	GOLD PLATING OVER NICKEL
(1)	HOUSING	1	PBT OR NYLON	UL94 V-0 OR 94 V-2
No.	PART NAME	QTY	MATERIAL	REMARK

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE		1:1	
DRAWING NO.		C-DS1129-XXXXX	

PROJECTION	TITLE
UNITS	mm
SHEET SIZE	A4
PCB JACK 8P 4PORT	
SERIES	DS1129 SERIES


**晨翔电子有限公司**  
**CONNFLY CONNFLY ELECTRONIC CO. LTD**