




REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 11/13/13'	~	

SPECIFICATION

1. Insulation Resistance: 1000MΩ Min.
2. Withstand Voltage: 1000V AC/Minute.
3. Voltage Rating: 125V AC/DC.
4. Current Rating: 1.5A.
5. Temperature Range: -40~+85°C.
6. Durability: 600 Mating Cycles Min.
7. Product Number Code:

DS1133-06 - X X X X X

- Housing Materials  
P: PBT  
N: NYLON
- Housing Color  
A: Gray  
B: Black
- Contact Plating  
0: Gold Flash  
3: Selective 3u" Gold
- No.Of Contacts  
6: 6P6C 4: 6P4C
- Connector Type  
S: Socket

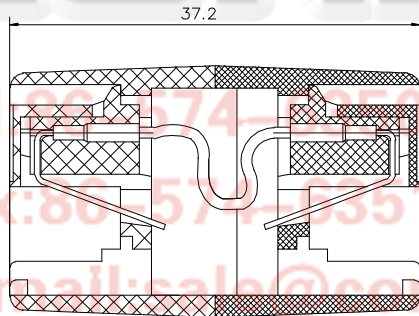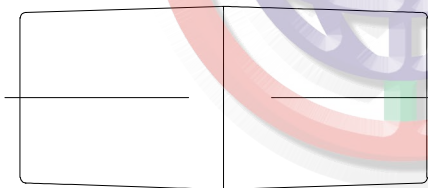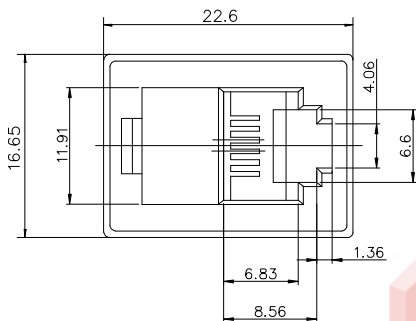

Tel: 86-574-2568787  
 Fax: 86-574-5510817  
 E-mail: sale@connfly.com  
 http://www.connfly.com  
 Add: East Industry Zone KuangYan  
 Town CkangYing, China  
 P.C: 315333

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5'
.X	±0.38	.X	±3'
.XX	±0.25	.XX	±2'

DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	C-DS1133-06-XXXXX

PROJECTION		TITLE	PCB JACK 6P ADAPTOR
UNITS	mm	SERIES	DS1133-06 SERIES
SHEET SIZE	A4		

晨翔电子有限公司  
 CONNFLY CONNFLY ELECTRONIC CO. LTD