





REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 08/19/16'	~	

SPECIFICATION

1. Insulation Resistance: 1000MΩ Min.
2. Withstand Voltage: 1000V AC/Minute.
3. Voltage Rating: 125V AC/DC.
4. Current Rating: 1.5A.
5. Temperature Range: -40~+85°C.
6. Durability: 600 Mating Cycles Min.
7. Product Number Code:

DS1133-09 - X X X X X X

- Ear Support
X:W/O Ear
S:W/ Ear
- Housing Materials
P:PBT
N:NYLON
- Contact Plating
8:Gold Flash
- Housing Color
A:Gray
B:Black
- No. Of Contacts
6:6P6C 4:6P4C 2:6P2C
- Connector Type
S:Socket

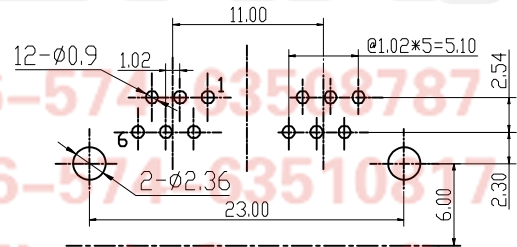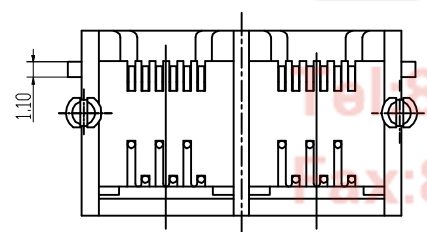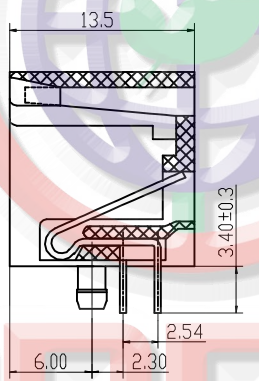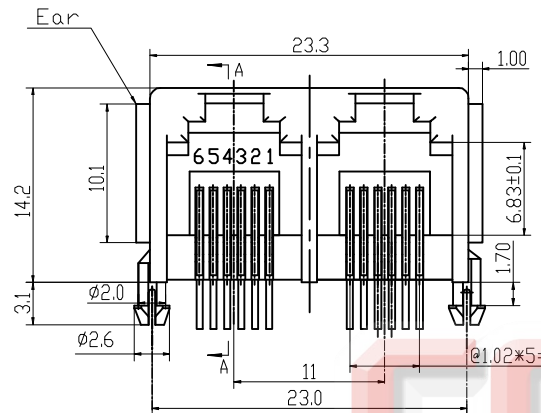

PC BOARD LAYOUT
THICKNESS=1.6MM

E-mail:sale@connfly.com

http://www.connfly.com

Add:East Industry Zone KuangYan

Town Cixilingbo Ch

P.C:315333

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	C-DS1133-09-XXXXX-A

PROJECTION		TITLE	PCB Jack 6 Positions 1*2 Port W/O Shell
UNITS	mm	SHEET SIZE	A4
SHEET SIZE	A4	SERIES	DS1133-09 SERIES

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD