


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 10/27/16'		

- NOTES:
- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 30mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - VOLTAGE RATING: 125V.
 - CURRENT RATING: 1.5A.
 - VOLTAGE(LED): 2.4V MAX.
 - ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -0°C~+70°C.
 - MATERIALS:
 - HOUSING: PA66 BLACK UL94 V-0
 - INSERT: PBT BLACK YELLOW UL94 V-0
 - CONTACT: COPPER ALLOY
 - CONTACT PLATING: SELECTIVE GOLD, 6u" MIN IN CONTACT AREA
 - PRODUCT NUMBER CODE: DS1134-11-X X X X X

- Housing Materials: N: Nylon
- Contact Plating: S: Selective 6u" Gold
- Housing Color: B: Black
- No. Of Contacts: 8: 8p8c
- Connector Type: S: Socket

PCB LAYOUT THICKNESS=1.6mm

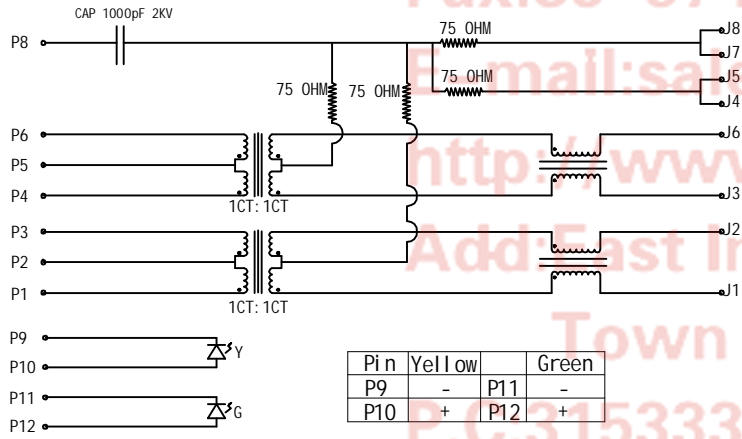

Pin	Yellow	Green
P9	-	P11 -
P10	+	P12 +

CIRCUIT SCHEMATIC

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER	
SCALE	1:1	SHEET 1 OF 1
DRAWING NO.	C-DS1134-11-XXXXX-A	

PROJECTION	TITLE
	RJ45 ICM(10/100 Base-T 1 Port)
UNITS	mm
SHEET SIZE	A4
SERIES	DS1134-11 SERIES

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD

Tel: 86-574-63508787
Fax: 86-574-63510817
E-mail: sales@connfly.com
http://www.connfly.com
Add: East Industry Zone Kuang Yan Town Cixi Ningbo City
P.C: 315333