


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 10/26/15'		

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - CURRENT RATING: 5A.
 - VOLTAGE RATING: 24V DC.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: 0°C~+80°C.
- MATERIALS
 - CONTACT MATERIAL: COPPER ALLOY.
 - CONTACT PLATING: GOLD
 - INSULATOR MATERIALS: PBT, BLACK, UL94-V0.
 - SHELL: PVC, BLACK.
- PRODUCT NUMBER CODE:
DS1137-19 - X X X X X X

- Wire Length(Dim L)
0150: 150mm
.....
- Housing Color
B: Black
- Contact Plating
8: Full Gold
6: Full Tin
- Mounting Type
S: Soldering
- Wire Gauge
22: AWG #22
24: AWG #24
- Connector Type:
F: Female
M: Male

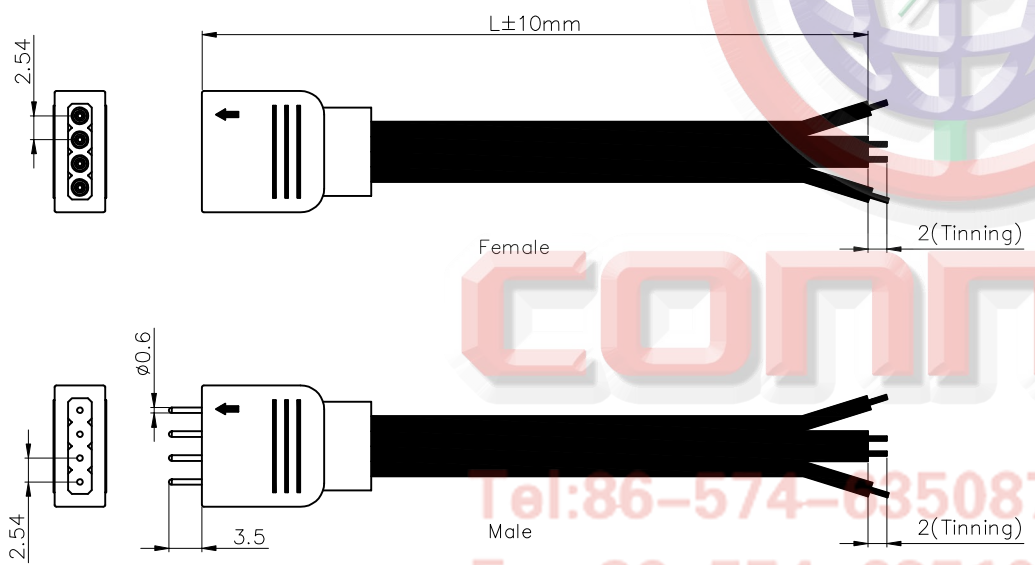

Tel:86-574-63508787
 Fax:86-574-63510817
 E-mail:sale@connfly.com
 http://www.connfly.com
 Add:East Industry Zone KuangYan
 Town Cici Ningbo
 P.C:3153

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	C-DS1137-19-XXXXXX-A

PROJECTION		TITLE	4Pin RGB LED Connector Cable
UNITS	mm	SERIES	DS1137-19 SERIES
SHEET SIZE	A4		

晨翔电子有限公司
 CONNFLY CONNFLY ELECTRONIC CO. LTD