


Dept
Qty
DC 1
ED 1
IE 1
ISO 1
PD 1
R&D 1
SD 1
QA 1
QC 1
QE 1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

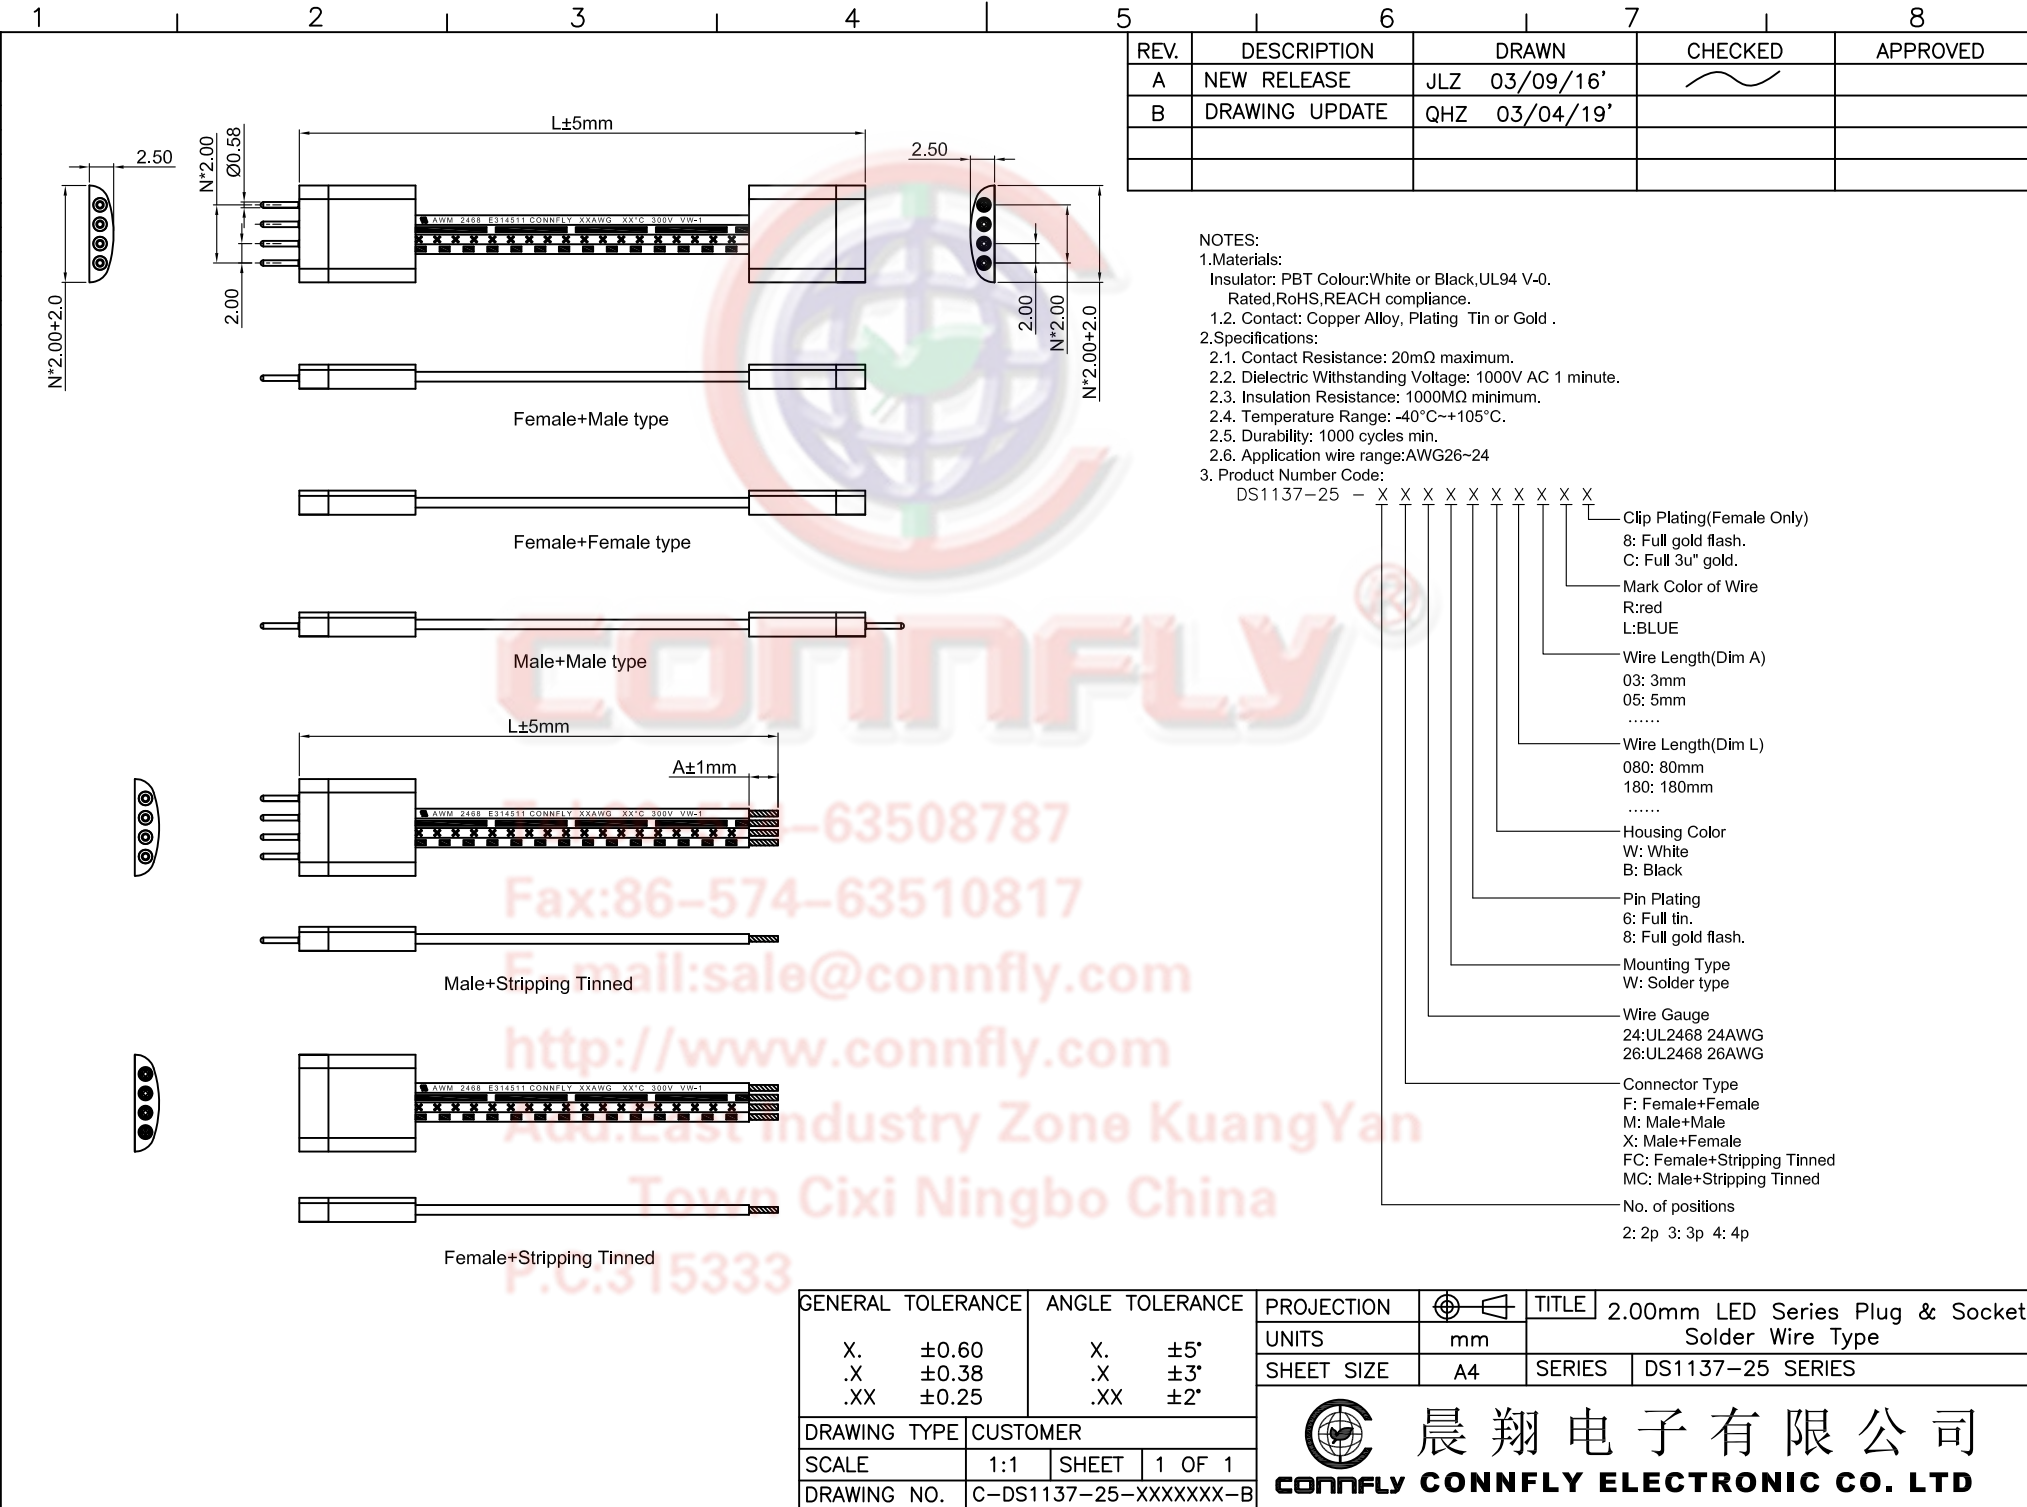

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 03/09/16'		
B	DRAWING UPDATE	QHZ 03/04/19'		

NOTES:

1. Materials:

Insulator: PBT Colour: White or Black, UL94 V-0.
Rated, RoHS, REACH compliance.

1.2. Contact: Copper Alloy, Plating Tin or Gold.

2. Specifications:

2.1. Contact Resistance: 20mΩ maximum.

2.2. Dielectric Withstanding Voltage: 1000V AC 1 minute.

2.3. Insulation Resistance: 1000MΩ minimum.

2.4. Temperature Range: -40°C~+105°C.

2.5. Durability: 1000 cycles min.

2.6. Application wire range: AWG26-24

3. Product Number Code:

DS1137-25 - X X X X X X X X X X

- Clip Plating(Female Only)
- 8: Full gold flash.
- C: Full 3u" gold.
- Mark Color of Wire
- R:red
- L:BLUE
- Wire Length(Dim A)
- 03: 3mm
- 05: 5mm
-
- Wire Length(Dim L)
- 080: 80mm
- 180: 180mm
-
- Housing Color
- W: White
- B: Black
- Pin Plating
- 6: Full tin.
- 8: Full gold flash.
- Mounting Type
- W: Solder type
- Wire Gauge
- 24: UL2468 24AWG
- 26: UL2468 26AWG
- Connector Type
- F: Female+Female
- M: Male+Male
- X: Male+Female
- FC: Female+Stripping Tinned
- MC: Male+Stripping Tinned
- No. of positions
- 2: 2p 3: 3p 4: 4p

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE		1:1	SHEET 1 OF 1
DRAWING NO.		C-DS1137-25-XXXXXXX-B	

PROJECTION	TITLE
	2.00mm LED Series Plug & Socket
UNITS	Solder Wire Type
SHEET SIZE	SERIES DS1137-25 SERIES

晨翔电子有限公司
CONNELY CONNELY ELECTRONIC CO. LTD