
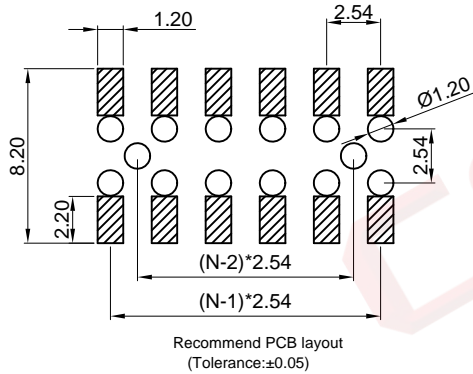
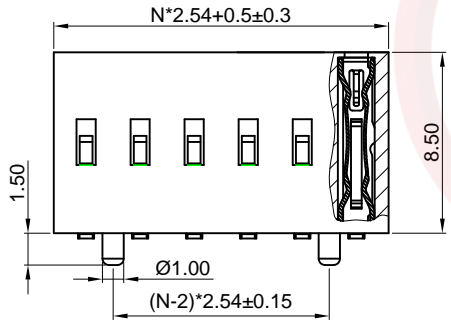



| | |
|------|-----|
| Dept | Qty |
| DC | 1 |
| ED | 1 |
| IE | 1 |
| ISO | 1 |
| PD | 1 |
| R&D | 1 |
| SD | 1 |
| QA | 1 |
| QC | 1 |
| QF | 1 |

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

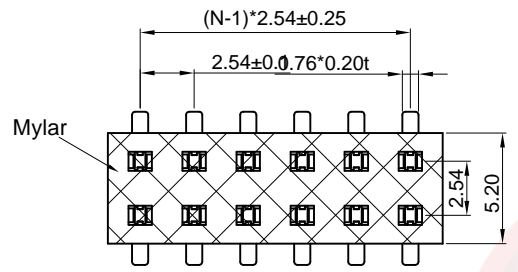

(Series Image-Reference Only)

N=No. of Contacts/2
W/ Post N≥3



| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|-------------|---------------|---------|----------|
| A | NEW RELEASE | JLZ 11/01/18' | | |
| | | | | |
| | | | | |

Notes:

Specifications:

1. Contact Resistance: 20mΩ Max.
2. Insulation Resistance: 1000MΩ Min.
3. Dielectric Withstanding Voltage: 600V AC(rms) For 1 Minute.
4. Current Rating:3A.
5. Voltage Rating:250V AC rms.
6. Temperature: -40°C~+105°C.

Materials:

1. Contact Material: Copper Alloy.
2. Contact Plating: Gold Plating Over Nickel.
3. Insulator Materials: High Temp,Black,UL94-V0.

Product Number Code:

DS1023-55 - X X X X X X X X

- Post support
- S: W/ Post
- X: W/O Post
- Packing type
- R:Tape on reel
- B:Tube
- Mylar support
- M: W/ Mylar
- X: W/O Mylar
- Housing color
- B: Black
- Contact plating
- 8: Full glod flash
- Mounting type
- S: SMT type
- Connector type
- S: Socket
- No. of contacts
- 2x2 - 2x20

| | | | | | | | | |
|-------------------|-------|----------------------|--------|--|----|-----------------------|--------------------------------|--|
| GENERAL TOLERANCE | | ANGLE TOLERANCE | | PROJECTION | | TITLE | 2.54mm Female header 6 Contact | |
| X. | ±0.60 | X. | ±5° | UNITS | mm | Area SMT Type H=8.5mm | | |
| .X | ±0.38 | .X | ±3° | SHEET SIZE | A4 | SERIES | DS1023-55 SERIES | |
| .XX | ±0.25 | .XX | ±2° | 晨翔电子有限公司 CONNFLY CONNELY ELECTRONIC CO. LTD | | | | |
| DRAWING TYPE | | CUSTOMER | | | | | | |
| SCALE | 1:1 | SHEET | 1 OF 1 | | | | | |
| DRAWING NO. | | C-DS1023-55-XXXXXX-A | | | | | | |